


General Rosette Equations

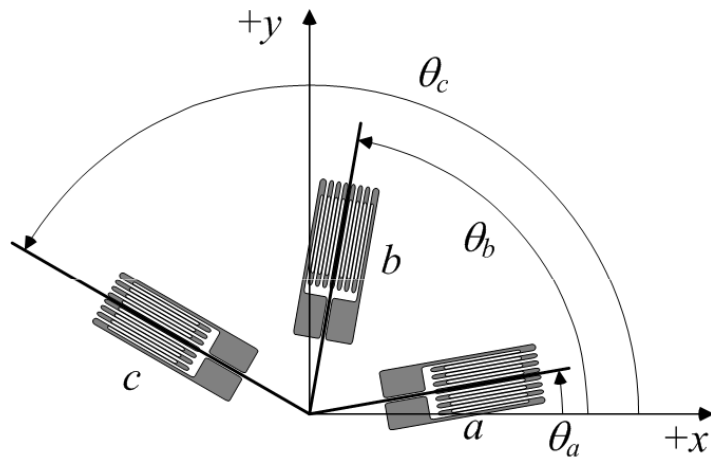


- Denote measured strains as ϵ_a , ϵ_b , and ϵ_c :
- Use strain transformation equation to relate each gage measurement to ϵ_{xx} , ϵ_{yy} , and γ_{xy} :

$$\epsilon_a = \epsilon_{xx} \cos^2 \theta_a + \epsilon_{yy} \sin^2 \theta_a + \gamma_{xy} \sin \theta_a \cos \theta_a$$

$$\epsilon_b = \epsilon_{xx} \cos^2 \theta_b + \epsilon_{yy} \sin^2 \theta_b + \gamma_{xy} \sin \theta_b \cos \theta_b$$

$$\epsilon_c = \epsilon_{xx} \cos^2 \theta_c + \epsilon_{yy} \sin^2 \theta_c + \gamma_{xy} \sin \theta_c \cos \theta_c$$

Rosette Equations for Rectangular Rosettes

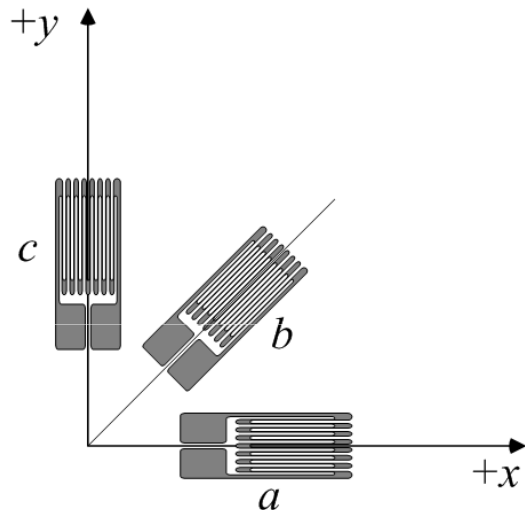

- Substituting:

$$\theta_a = 0^\circ$$

$$\theta_b = 45^\circ$$

$$\theta_c = 90^\circ$$


in general rosette equations and inverting, we obtain:

$$\epsilon_{xx} = \epsilon_a$$

$$\epsilon_{yy} = \epsilon_c$$

$$\gamma_{xy} = 2\epsilon_b - (\epsilon_a + \epsilon_c)$$

Rosette Equations for Delta Rosettes

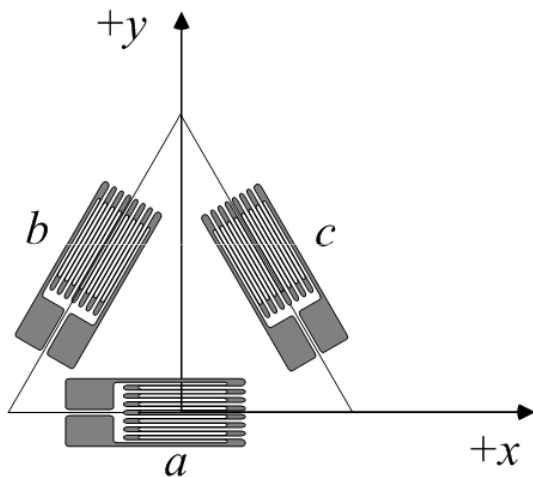

- Substituting:

$$\theta_a = 0^\circ$$

$$\theta_b = 60^\circ$$

$$\theta_c = 120^\circ$$

in general rosette equations and inverting, we obtain:

$$\epsilon_{xx} = \epsilon_a$$

$$\epsilon_{yy} = \frac{1}{3} [2(\epsilon_b + \epsilon_c) - \epsilon_a]$$

$$\gamma_{xy} = \frac{2}{\sqrt{3}} [\epsilon_b - \epsilon_c]$$