
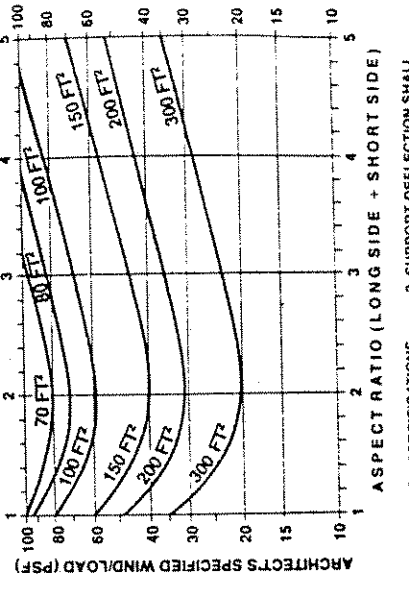
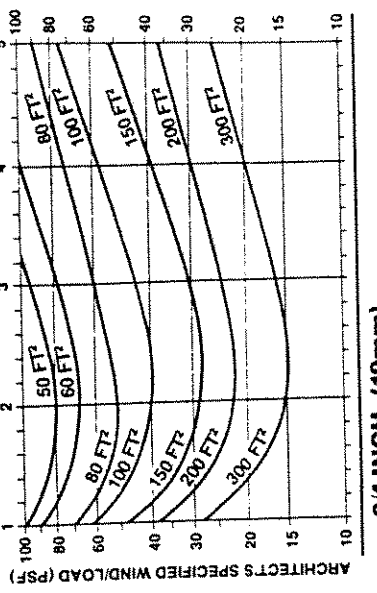
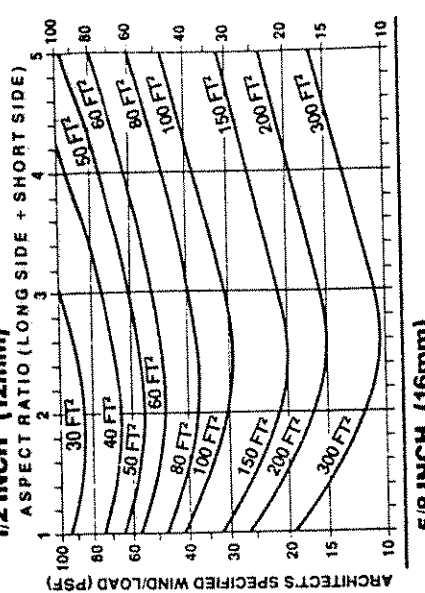
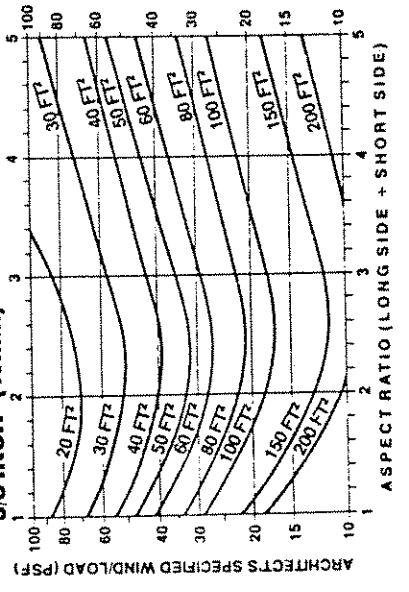
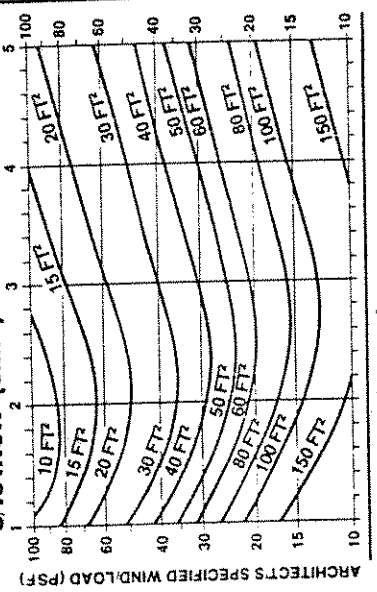
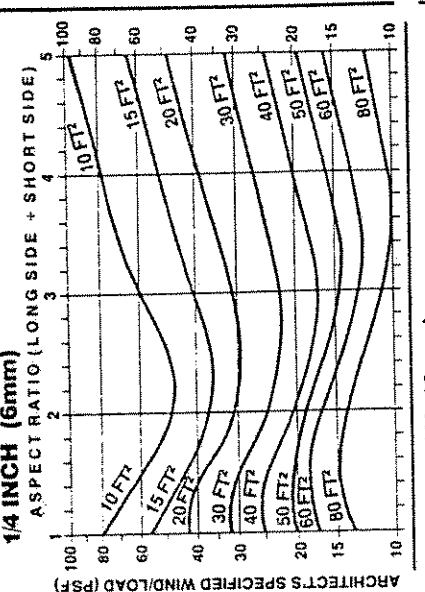
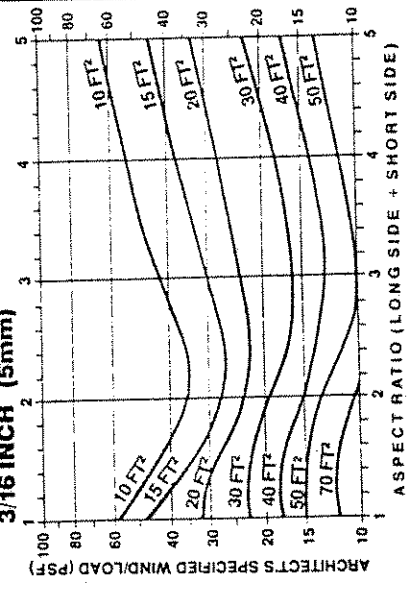
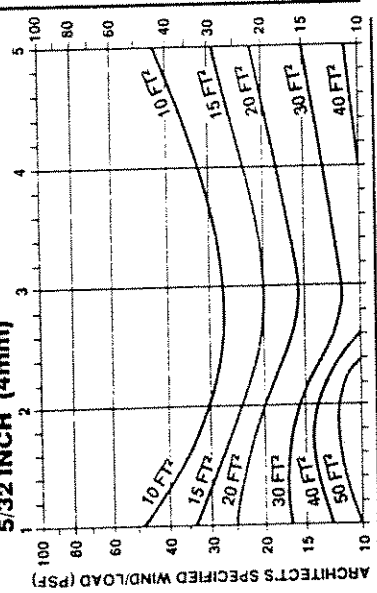


Architects Specified Probability  
of Breakage = 8/1000 Lights  
for a 1-Minute Uniform  
Wind Load Duration

# PPG ANNEA' 4-SIDE FLOAT GLASS

Four Sides Support  
in Weathertight Ra

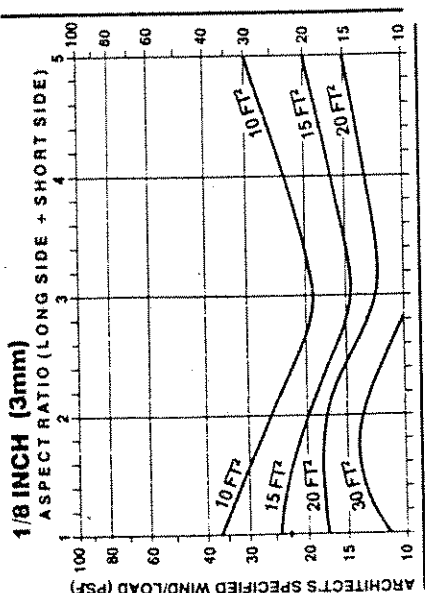

FOOTNOTES: 1. CONTACT YOUR PPG REPRESENTATIVE FOR:  
A. NON-LISTED PPG ARCHITECTURAL PRODUCTS.

B. DESIGN SPECIFICATIONS NOT SHOWN.  
2. IMPACT AND OTHER LOAD CONSIDERATIONS REQUIRE SPECIAL STUDY.

3. SUPPORT DEFLECTION SHALL NOT EXCEED 1/75 SPAN AT DESIGN LOAD.  
4. CHECK SPECIFICATIONS AND CODE REQUIREMENTS.