Taxonomy of metals

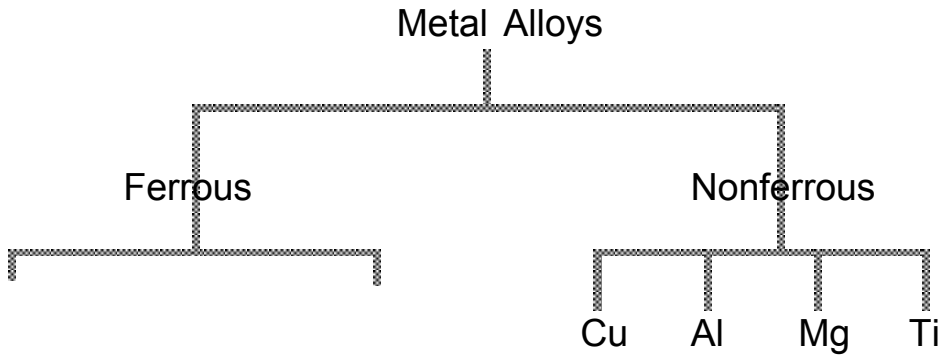

Adapted from Fig. 11.1, *Callister 7e*.

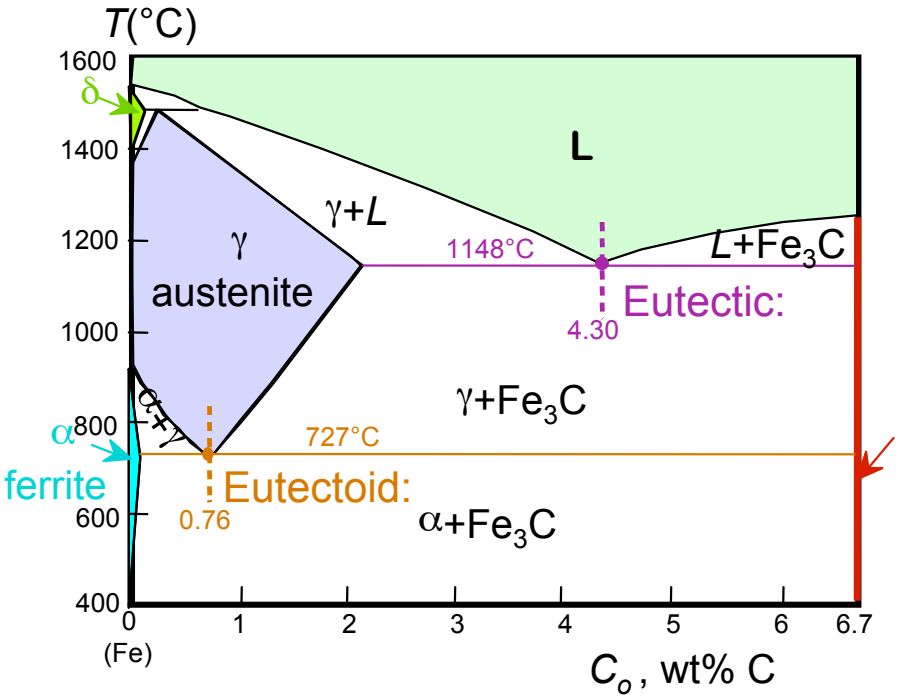

Adapted from Fig. 9.24, *Callister 7e*. (Fig. 9.24 adapted from *Binary Alloy Phase Diagrams*, 2nd ed., Vol. 1, T.B. Massalski (Ed.-in-Chief), ASM International, Materials Park, OH, 1990.)

Steels

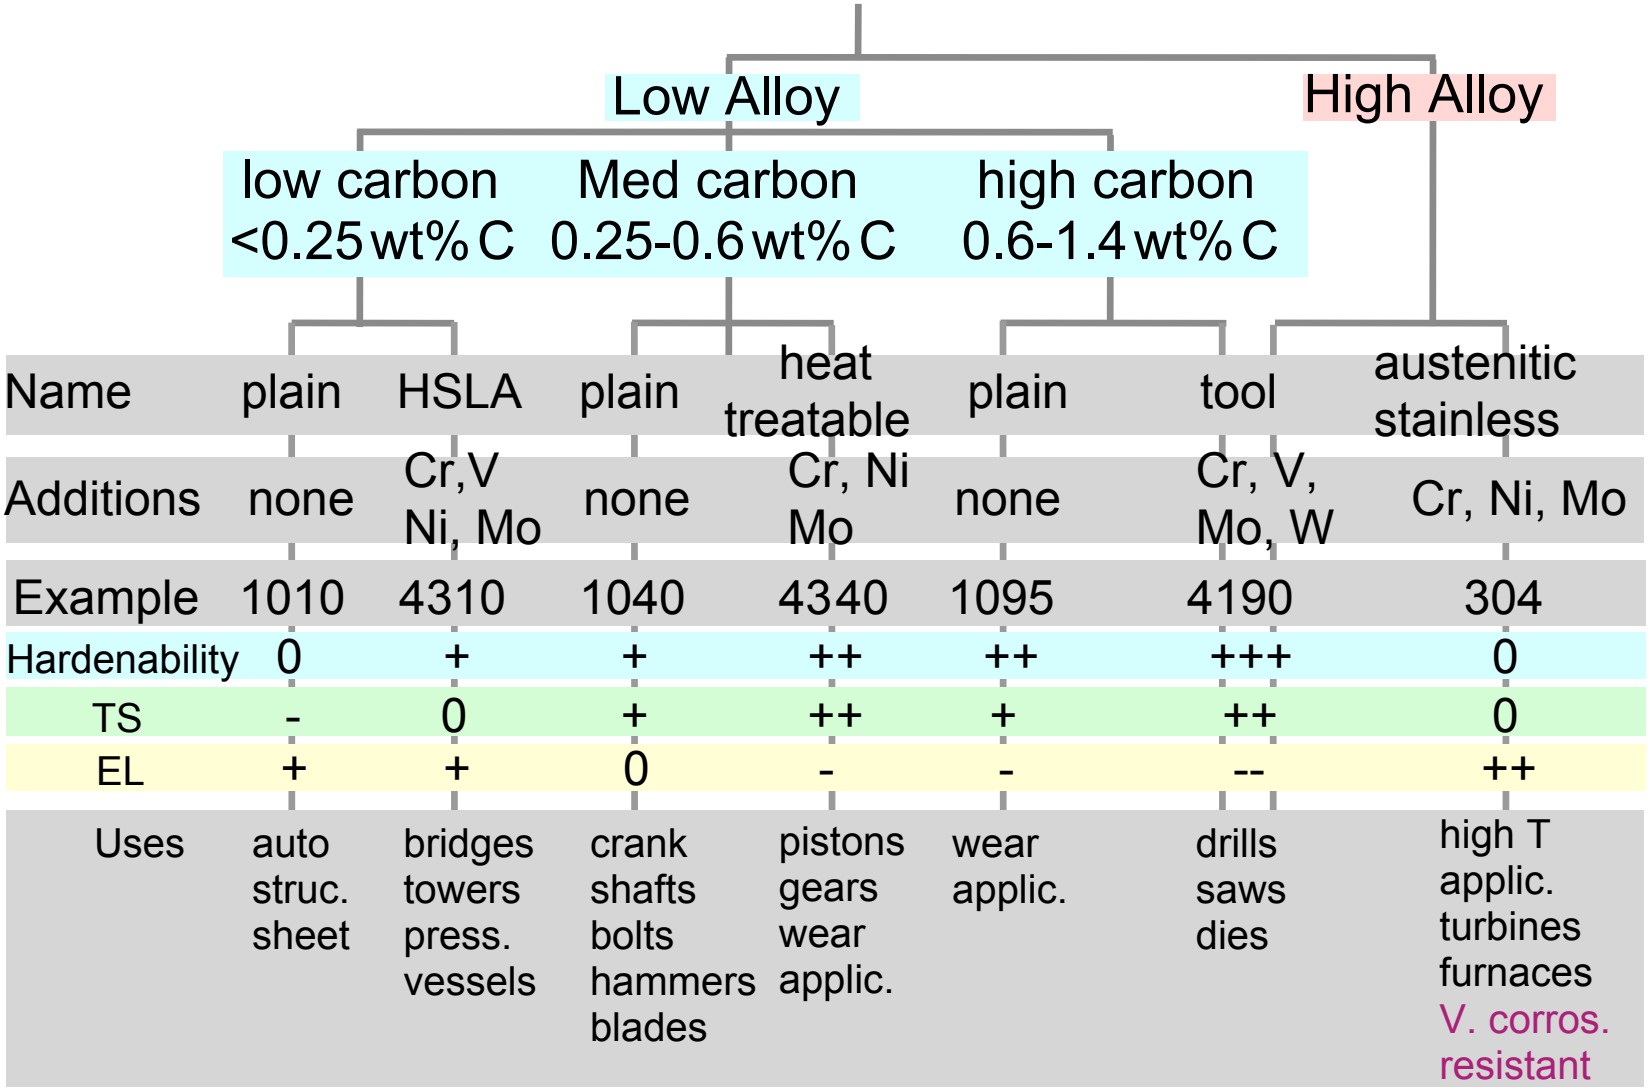

Based on data provided in Tables 11.1(b), 11.2(b), 11.3, and 11.4, *Callister 7e*.

Nomenclature for steel

Nomenclature	AISI & SAE
10xx	Plain Carbon Steels
11xx	Plain Carbon Steels (resulfurized for machinability)
15xx	Mn (10 ~ 20%)
40xx	Mo (0.20 ~ 0.30%)
43xx	Ni (1.65 - 2.00%), Cr (0.4 - 0.90%), Mo (0.2 - 0.3%)
44xx	Mo (0.5%)

where xx is wt% C x 100

example: 1060 steel – plain carbon steel with 0.60 wt% C

Stainless Steel -- >11% Cr

Cast iron

- Ferrous alloys with > 2.1 wt% C
  - more commonly 3 - 4.5 wt%C
- low melting (also brittle) so easiest to cast

- Cementite decomposes to ferrite + graphite

$Fe_3C \rightarrow 3\ Fe\ (\alpha) + C\ (graphite)$

- Decomposition promoted by Si

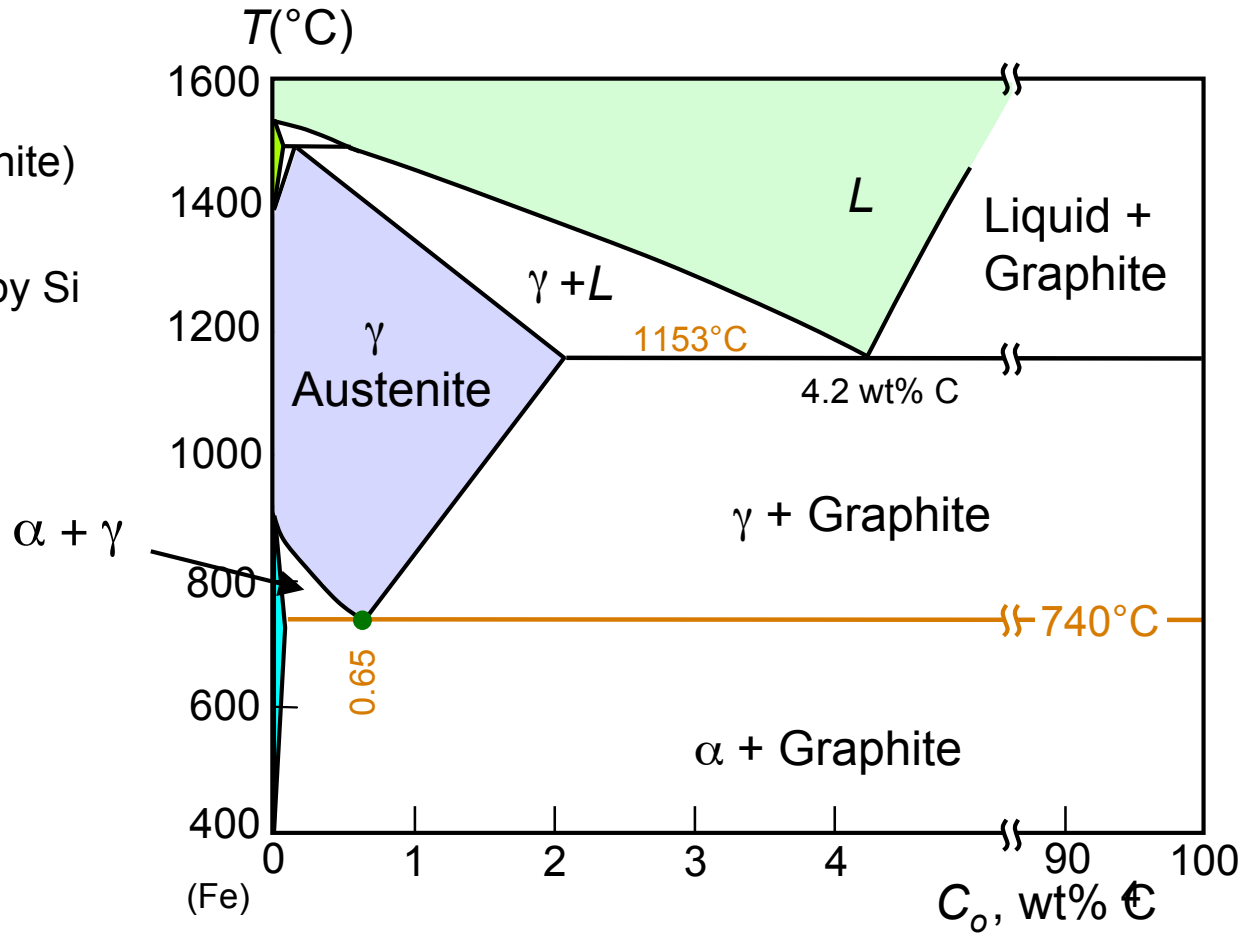

Adapted from Fig. 11.2, *Callister 7e*. (Fig. 11.2 adapted from *Binary Alloy Phase Diagrams*, 2nd ed., Vol. 1, T.B. Massalski (Ed.-in-Chief), ASM International, Materials Park, OH, 1990.)

Types of cast iron

Gray iron

- graphite flakes
- weak & brittle under tension
- stronger under compression
- excellent vibrational dampening
- wear resistant

Ductile iron

- add Mg or Ce
- graphite in nodules not flakes
- matrix often pearlite - better ductility

Adapted from Fig. 11.3(a) & (b), *Callister 7e*.

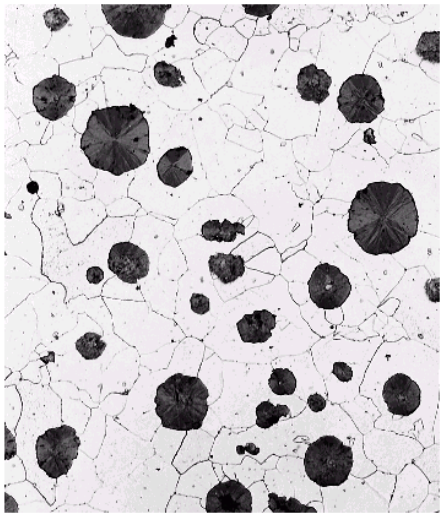

Types of cast iron

White iron

- <1wt% Si so harder but brittle
- more cementite

Adapted from Fig. 11.3(c) & (d), *Callister 7e*.

Malleable iron

- heat treat at 800-900ºC
- graphite in rosettes
- more ductile

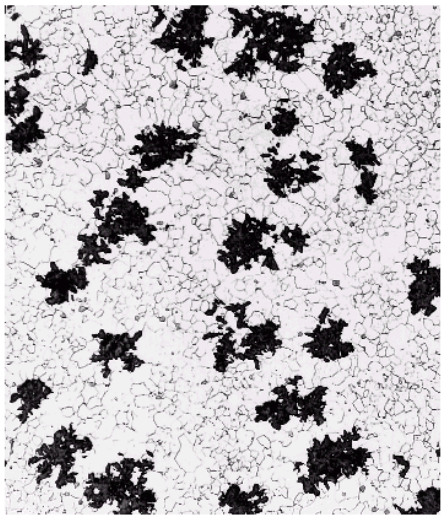

Production of cast iron

Adapted from Fig.11.5, *Callister 7e*.

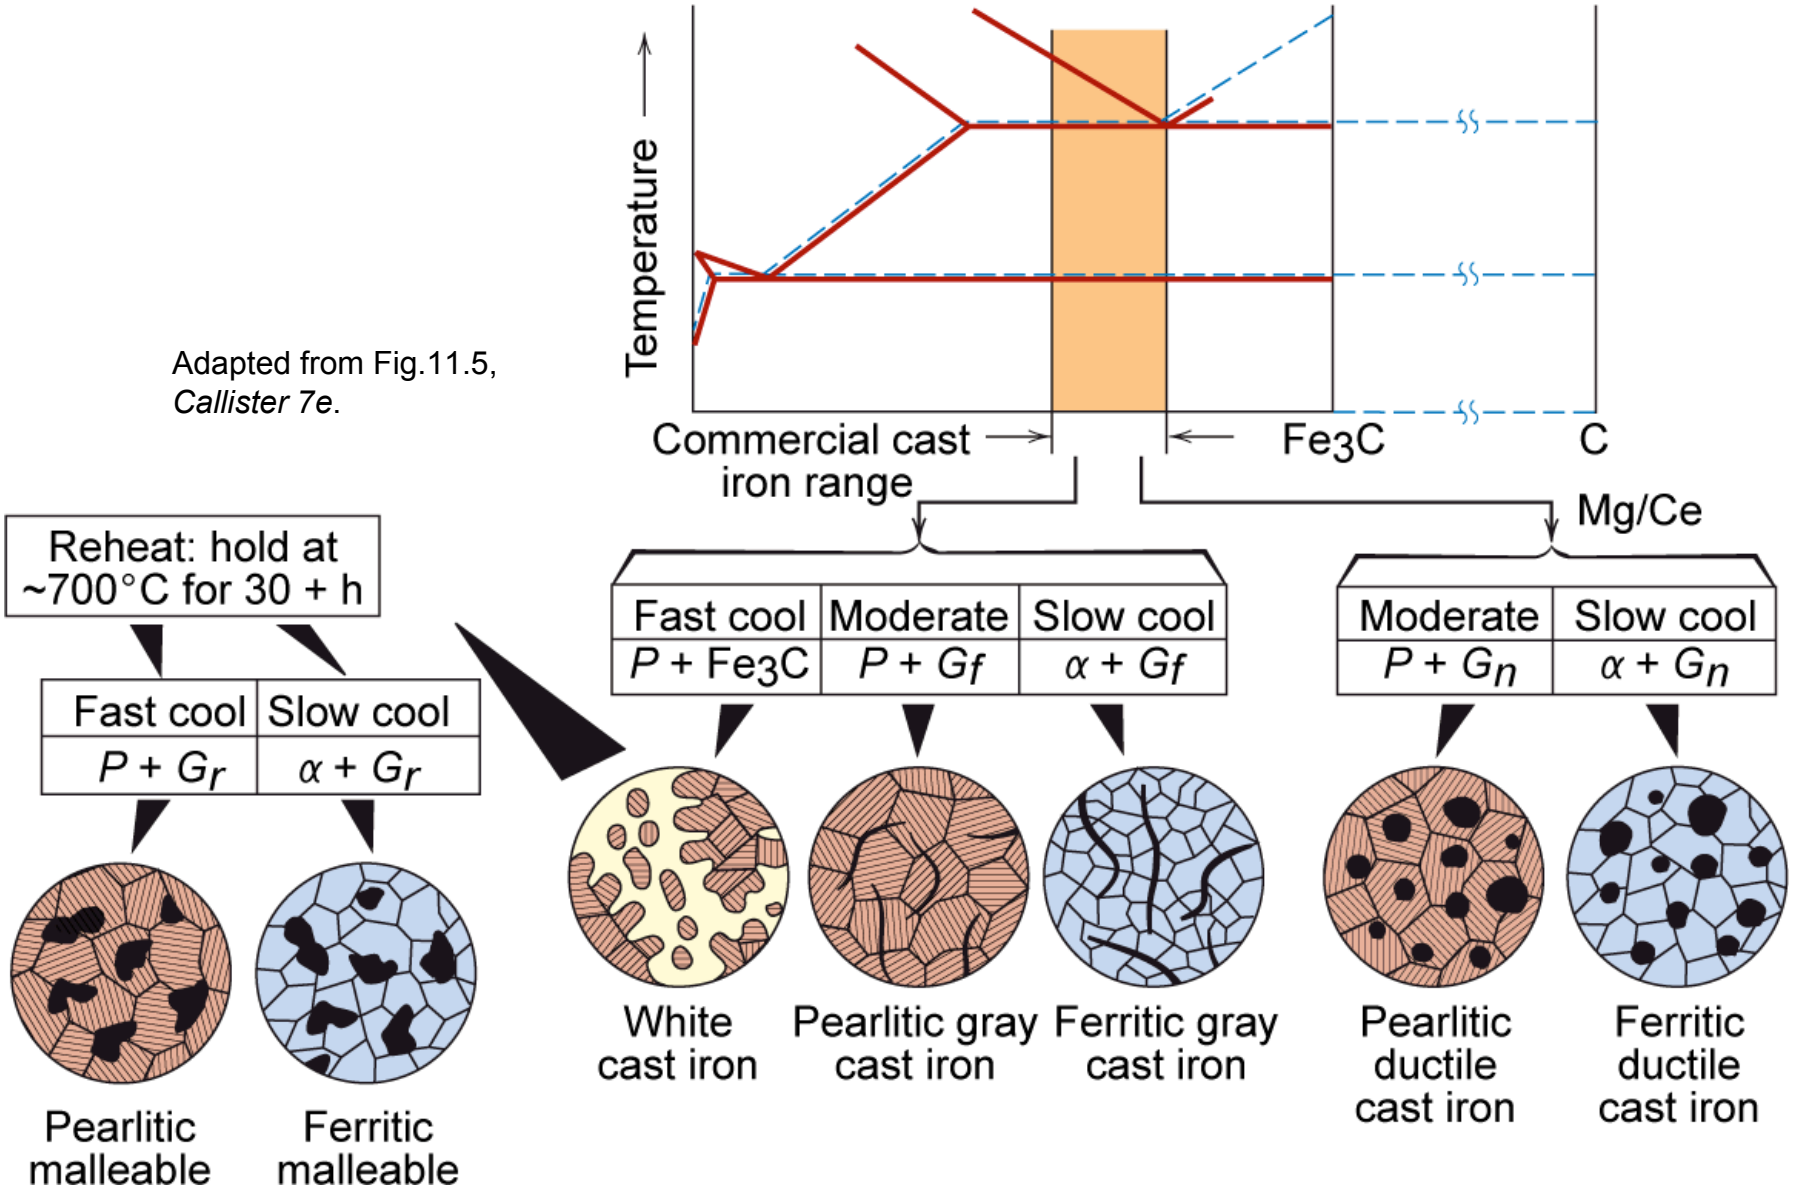

Other alloys

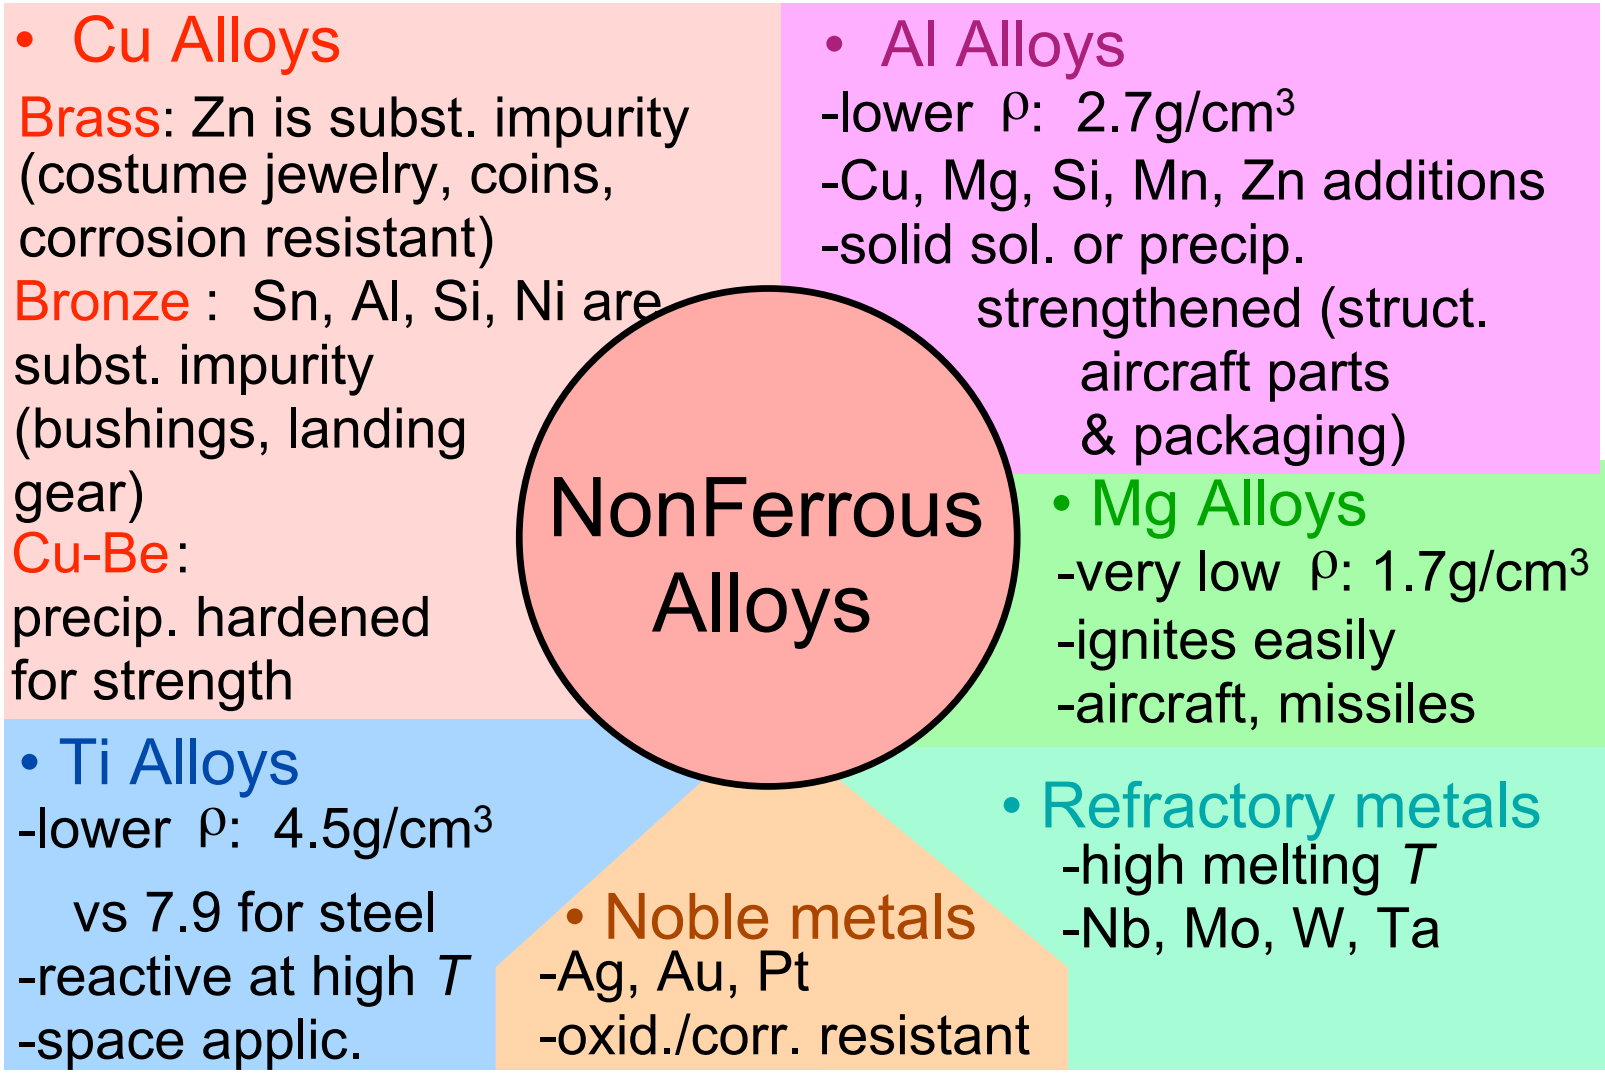

Based on discussion and data provided in Section 11.3, *Callister 7e*.

Metal fabrication methods 1

FORMING CASTING JOINING

- Forging (Hammering; Stamping)
  (wrenches, crankshafts)

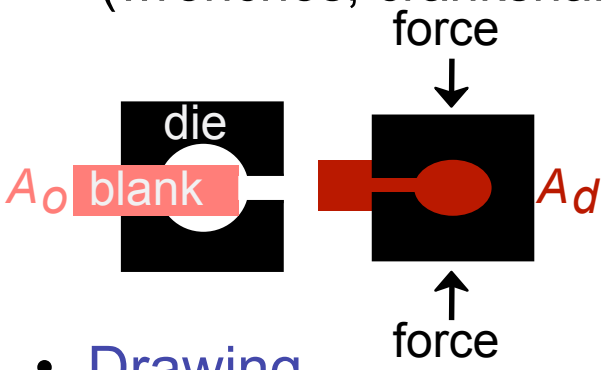

often at elev. *T*

- Drawing
  (rods, wire, tubing)

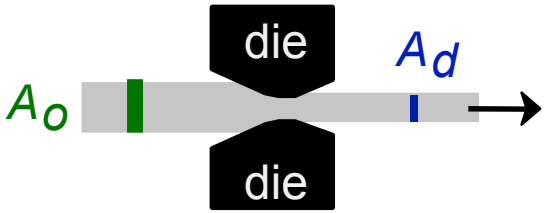

die must be well lubricated & clean

- Rolling (Hot or Cold Rolling)
  (I-beams, rails, sheet & plate)

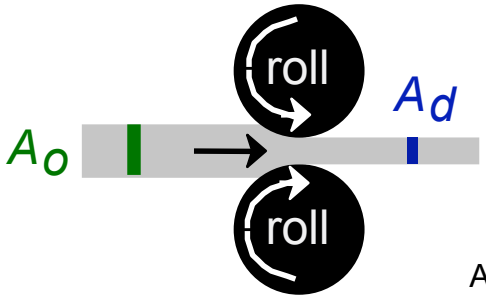

Adapted from Fig. 11.8, *Callister 7e*.

- Extrusion
  (rods, tubing)

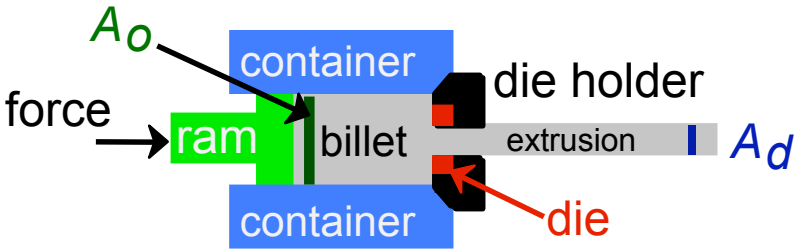

ductile metals, e.g. Cu, Al (hot)

Metal fabrication methods 2

FORMING | CASTING | JOINING

- Sand Casting
  (large parts, e.g.,
  auto engine blocks)

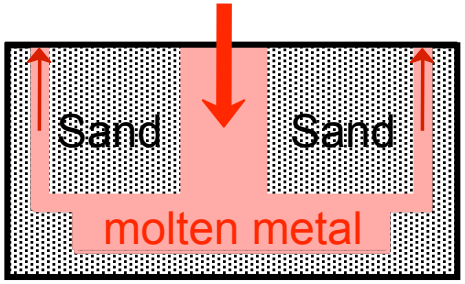

- Investment Casting
  (low volume, complex shapes
  e.g., jewelry, turbine blades)

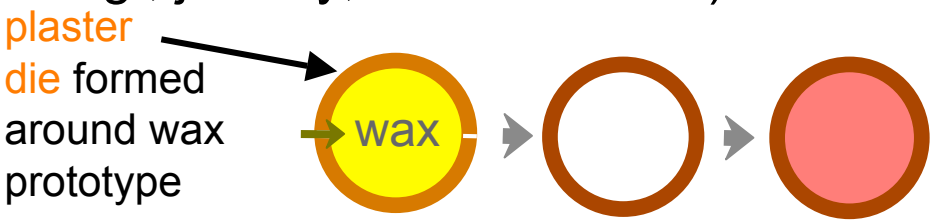

- Die Casting
  (high volume, low T alloys)

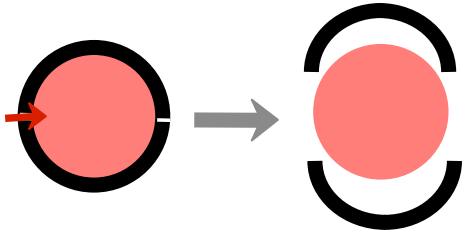

- Continuous Casting
  (simple slab shapes)

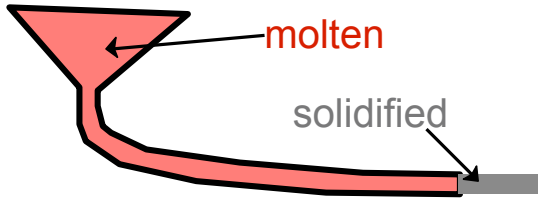

Metal fabrication methods 3

FORMING CASTING JOINING

- Powder Metallurgy
  (materials w/low ductility)

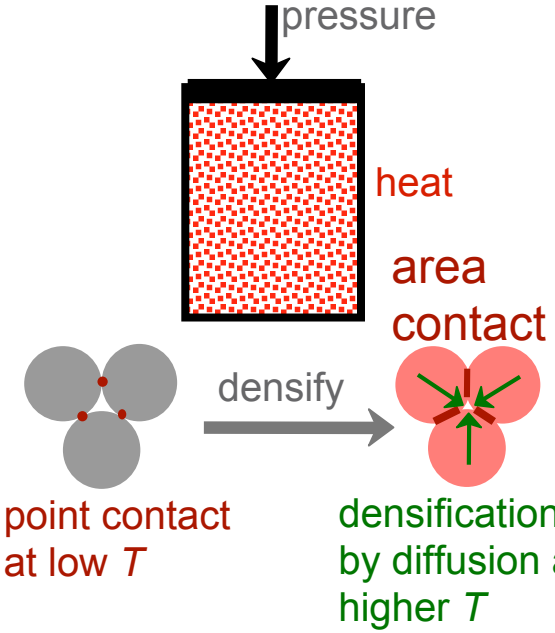

- Welding
  (when one large part is impractical)

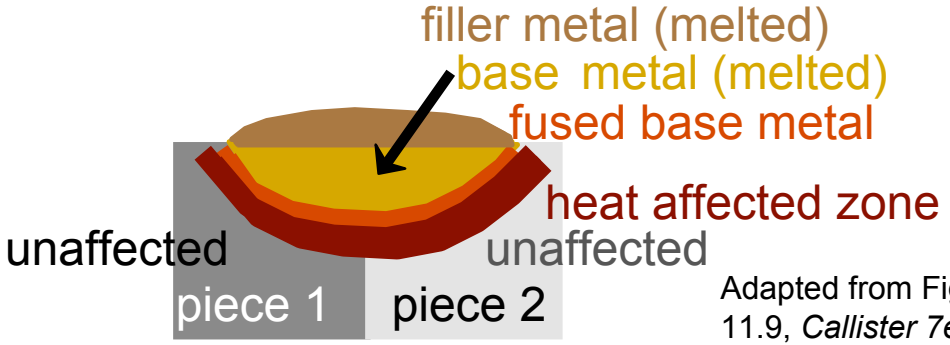

Adapted from Fig. 11.9, *Callister 7e*. (Fig. 11.9 from *Iron Castings Handbook*, C.F. Walton and T.J. Opar (Ed.), 1981.)

- Heat affected zone:
  (region in which the microstructure has been changed).

Thermal processing of metals

Annealing: Heat to T_{anneal}, then cool slowly.

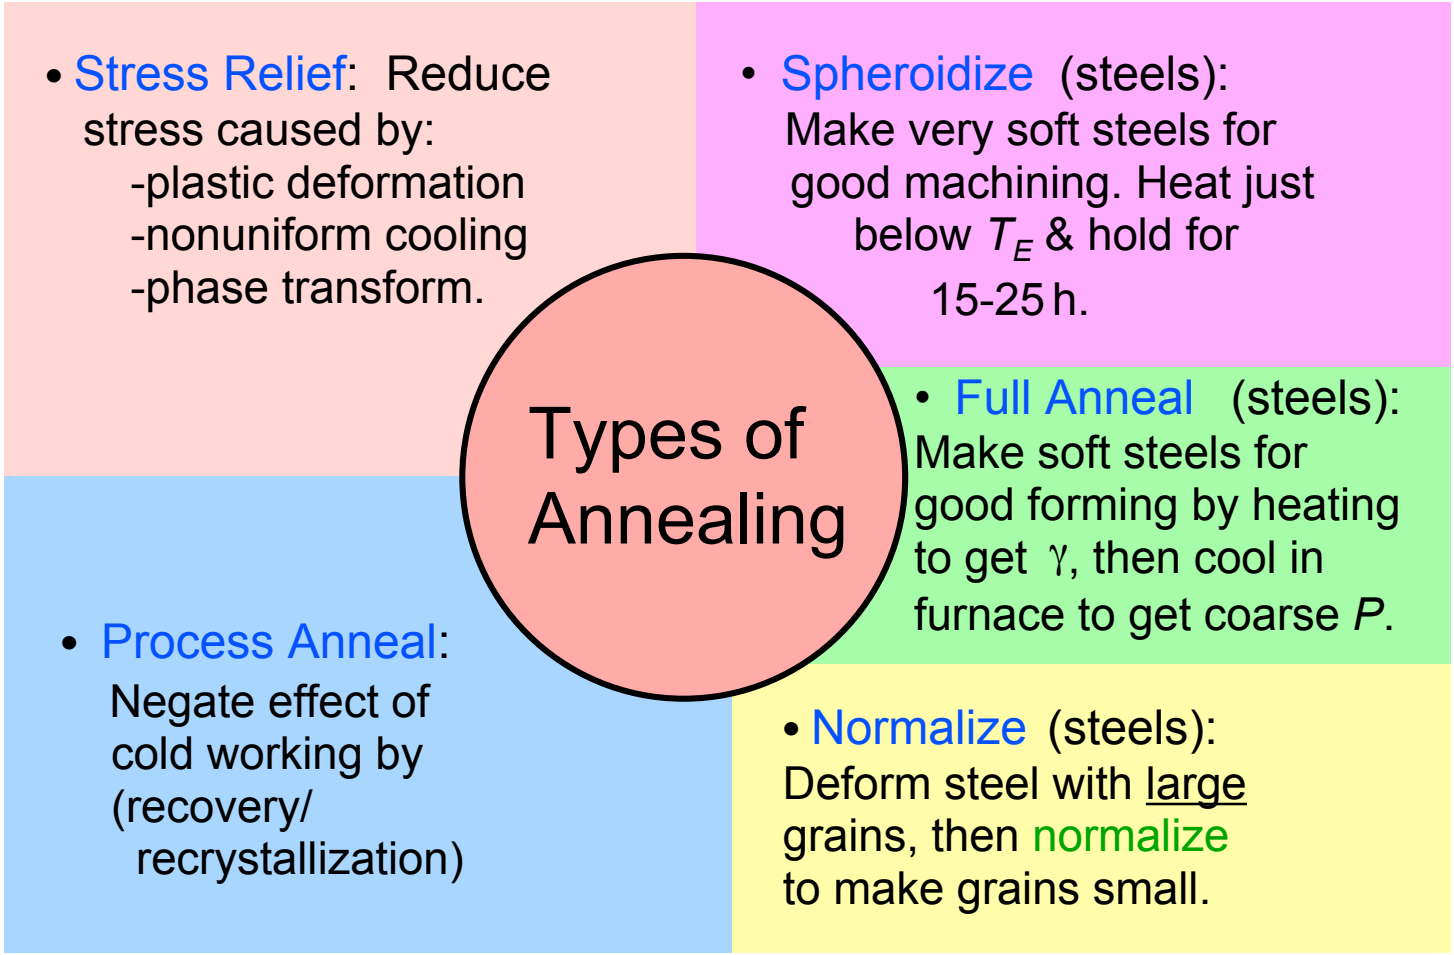

Based on discussion in Section 11.7, *Callister 7e*.

Heat treatments

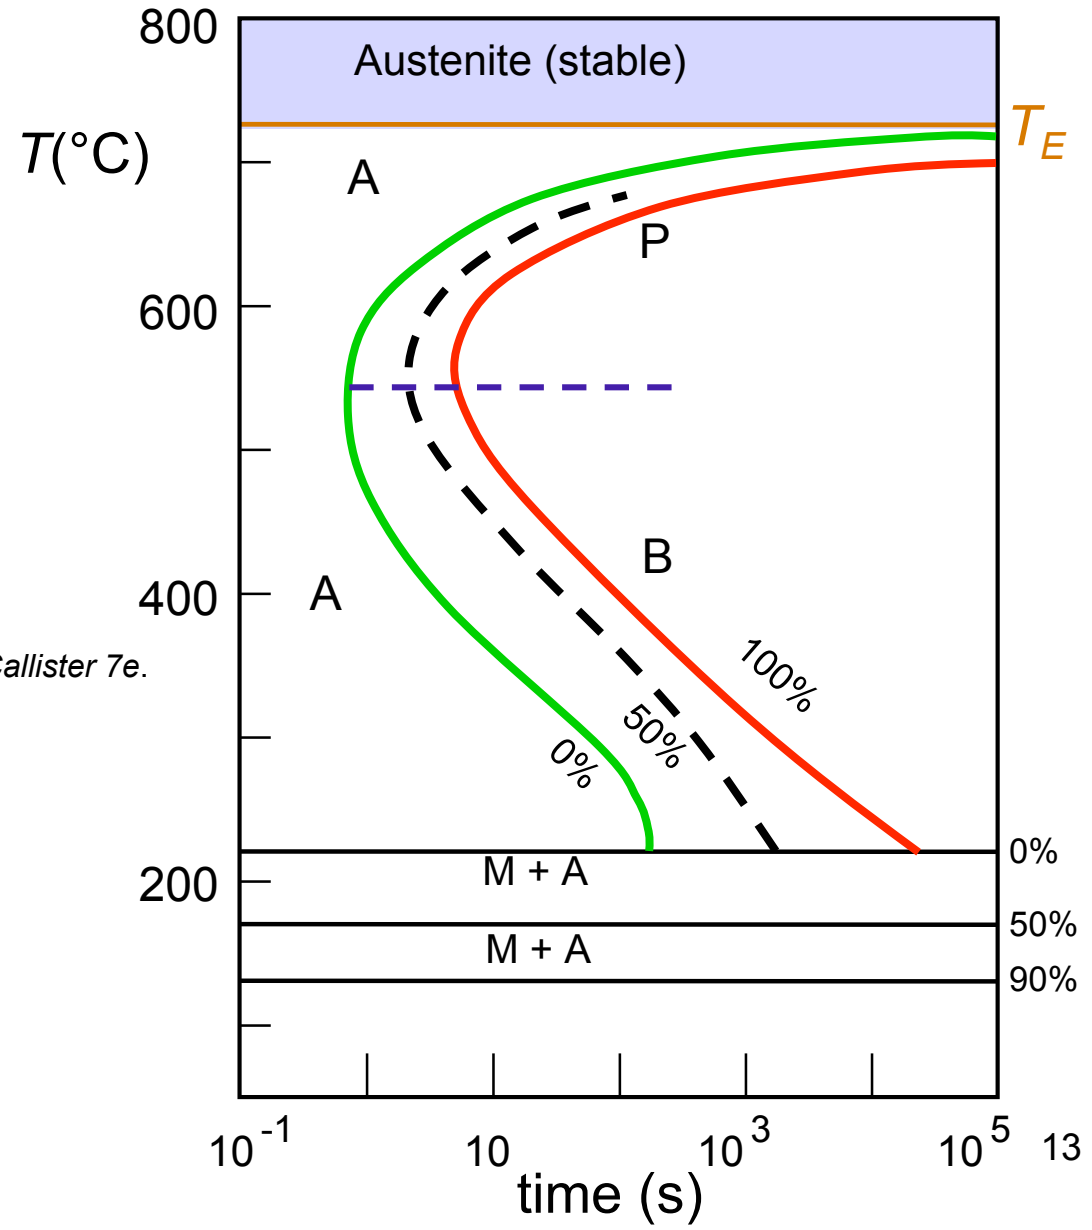

Adapted from Fig. 10.22, *Callister 7e*.

Precipitation hardening

- Particles impede dislocations.
- Ex: Al-Cu system
- Procedure:

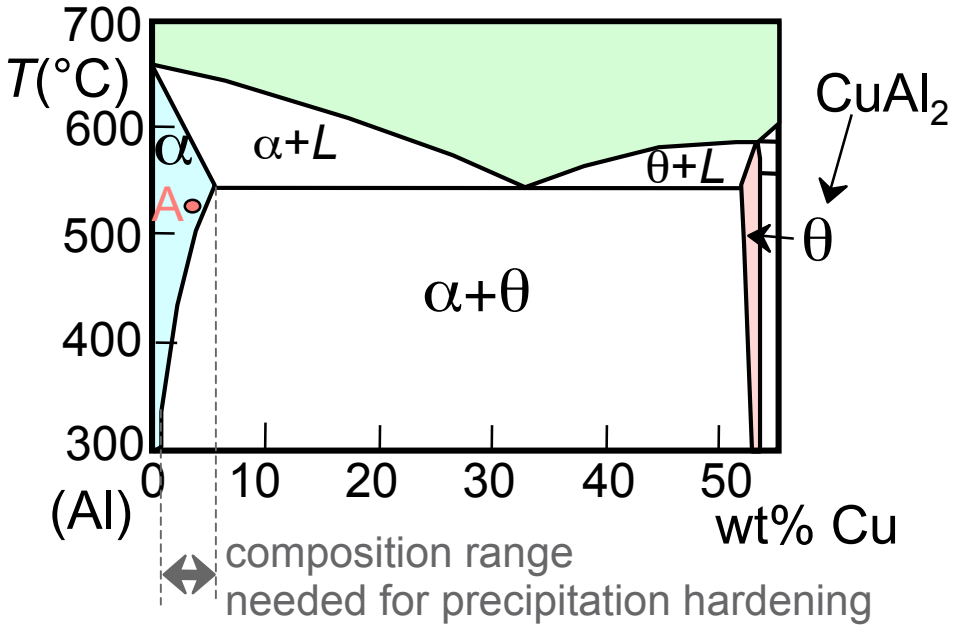

Adapted from Fig. 11.24, *Callister 7e*. (Fig. 11.24 adapted from J.L. Murray, *International Metals Review* **30**, p.5, 1985.)

- Other precipitation systems:
  - Cu-Be
  - Cu-Sn
  - Mg-Al

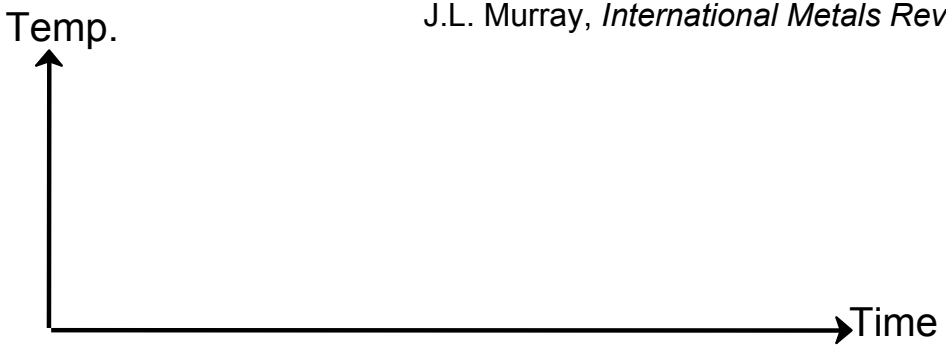

Adapted from Fig. 11.22, *Callister 7e*.

Precipitation hardening

- 2014 Al Alloy:
- *TS* peaks with precipitation time.
- Increasing *T* accelerates process.

- %*EL* reaches minimum with precipitation time.

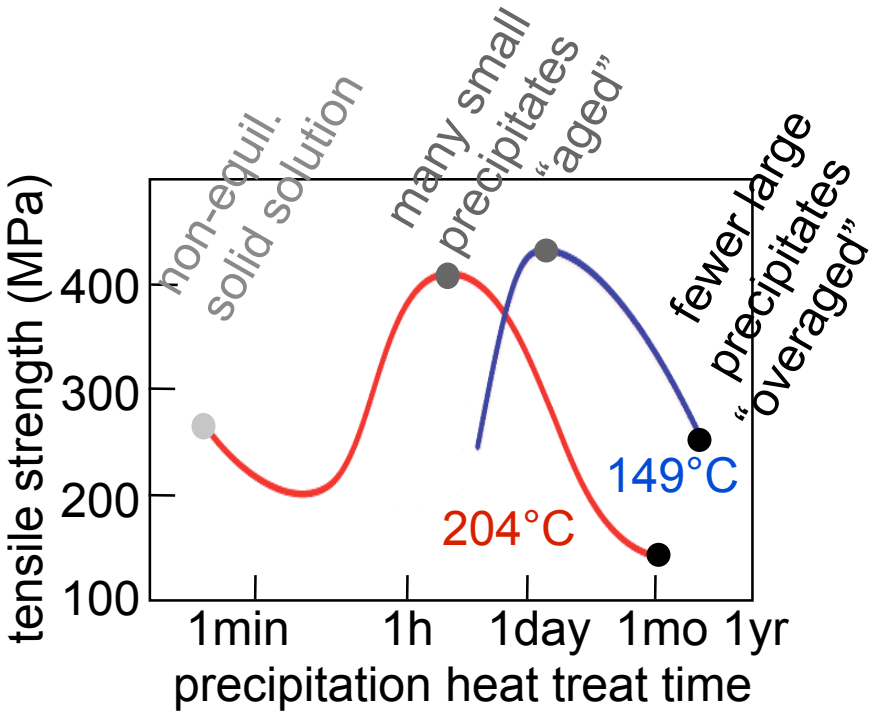

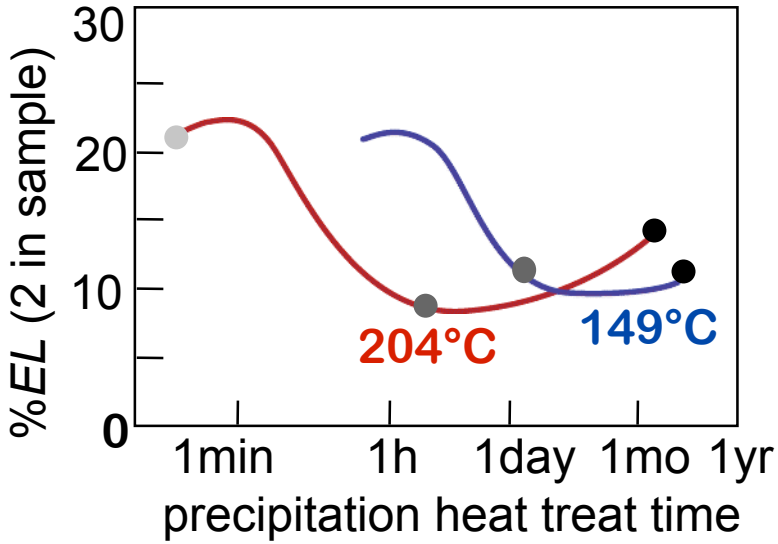

Adapted from Fig. 11.27 (a) and (b), *Callister 7e*. (Fig. 11.27 adapted from *Metals Handbook: Properties and Selection: Nonferrous Alloys and Pure Metals*, Vol. 2, 9th ed., H. Baker (Managing Ed.), American Society for Metals, 1979. p. 41.)

Ceramics

- Bonding:
  -- Mostly ionic, some covalent.
  -- % ionic character increases with difference in electronegativity.

- Large vs small ionic bond character:

IA							VIII					IIIA	IVA	VA	VIA	VIIA	0
H 2.1	IIA									IB	IIB						He –
Li 1.0	Be 1.5											B 2.0	C 2.5	N 3.0	O 3.5	F 4.0	Ne –
Na 0.9	Mg 1.2	IIIB	IVB	VB	VIB	VIIB						Al 1.5	Si 1.8	P 2.1	S 2.5	Cl 3.0	Ar –
K 0.8	Ca 1.0	Sc 1.3	Ti 1.5	V 1.6	Cr 1.6	Mn 1.5	Fe 1.8	Co 1.8	Ni 1.8	Cu 1.9	Zn 1.6	Ga 1.6	Ge 1.8	As 2.0	Se 2.4	Br 2.8	Kr –
Rb 0.8	Sr 1.0	Y 1.2	Zr 1.4	Nb 1.6	Mo 1.8	Tc 1.9	Ru 2.2	Rh 2.2	Pd 2.2	Ag 1.9	Cd 1.7	In 1.7	Sn 1.8	Sb 1.9	Te 2.1	I 2.5	Xe –
Cs 0.7	Ba 0.9	La–Lu 1.1–1.2	Hf 1.3	Ta 1.5	W 1.7	Re 1.9	Os 2.2	Ir 2.2	Pt 2.2	Au 2.4	Hg 1.9	Tl 1.8	Pb 1.8	Bi 1.9	Po 2.0	At 2.2	Rn –
Fr 0.7	Ra 0.9	Ac–No 1.1–1.7															

Adapted from Fig. 2.7, *Callister 7e.* (Fig. 2.7 is adapted from Linus Pauling, *The Nature of the Chemical Bond*, 3rd edition, Copyright 1939 and 1940, 3rd edition. Copyright 1960 by Cornell University.

Silicate Ceramics

- Most common elements on earth are Si & O

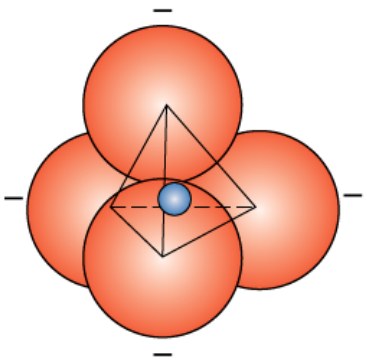



Adapted from Figs. 12.9-10, *Callister 7e.*

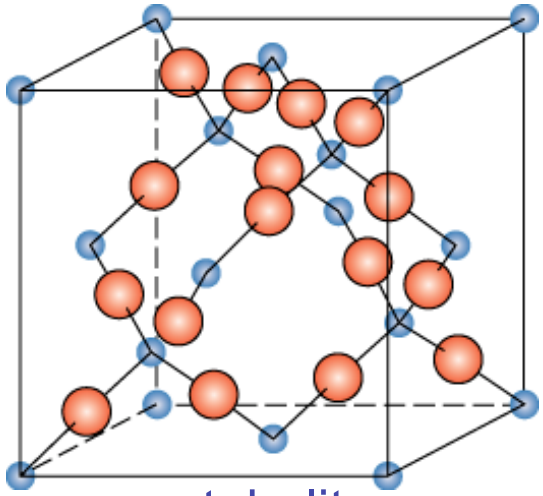

crystobalite

- SiO_2 (silica) structures are quartz, crystobalite, & tridymite
- The strong Si-O bond leads to a strong, high melting material (1710ºC)

Amorphous silica

- Silica gels - amorphous SiO_2
  - Si^{4+} and O^{2-} not in well-ordered lattice
  - Charge balanced by H^+ (to form OH^-) at "dangling" bonds
    - very high surface area > 200 m^2/g
  - SiO_2 is quite stable, therefore unreactive
    - makes good catalyst support

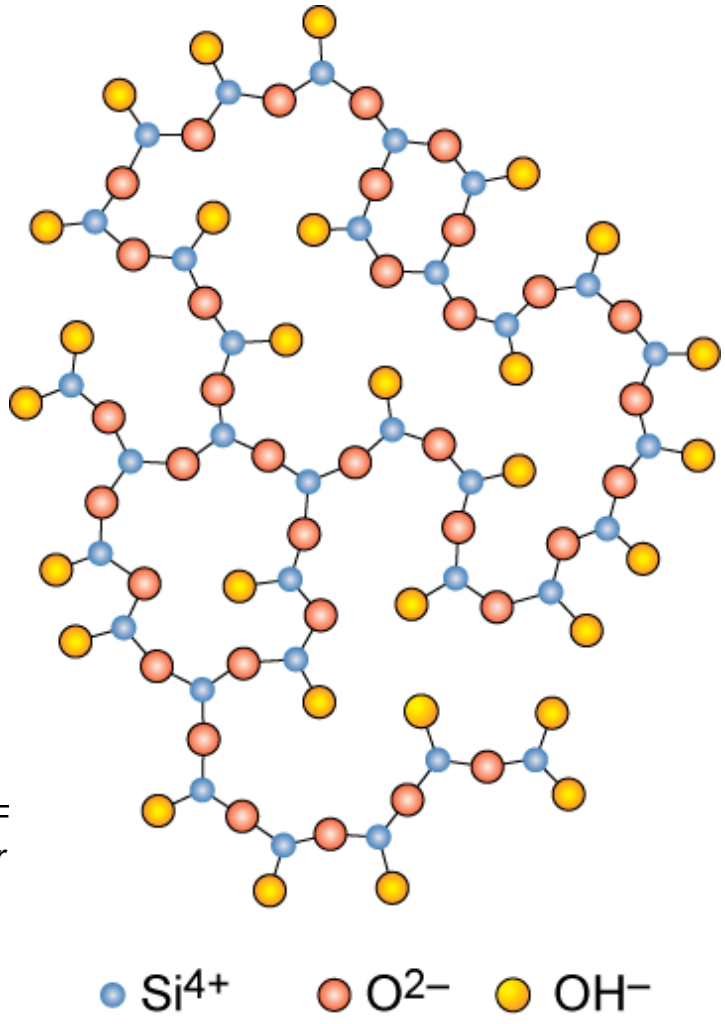

Adapted from F 12.11, *Callister*

Silicates

- Combine SiO_4^{4-} tetrahedra by having them share corners, edges, or faces

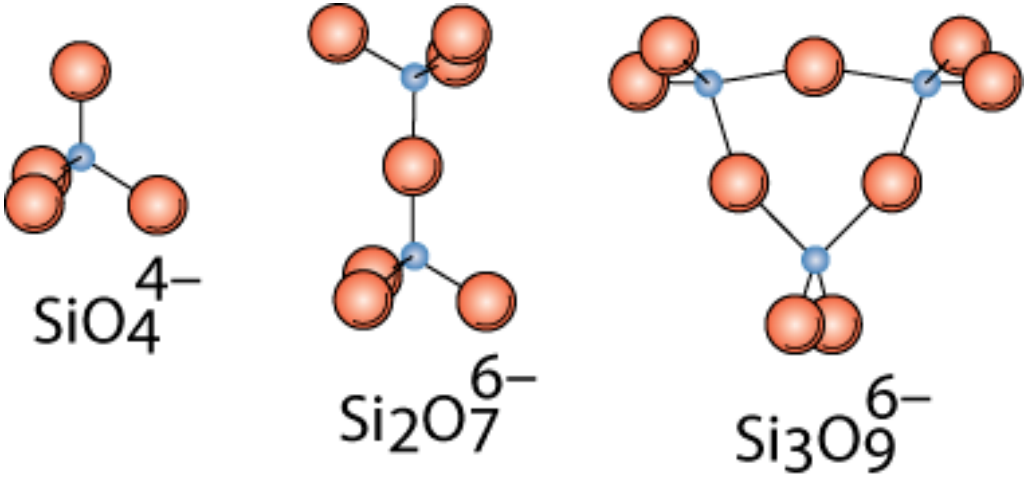

Adapted from Fig. 12.12, *Callister 7e.*

Mg_2SiO_4 $Ca_2MgSi_2O_7$

- Cations such as Ca^{2+}, Mg^{2+}, & Al^{3+} act to neutralize & provide ionic bonding

Layered silicates

- Layered silicates (clay silicates)
  - SiO_4 tetrahedra connected together to form 2-D plane

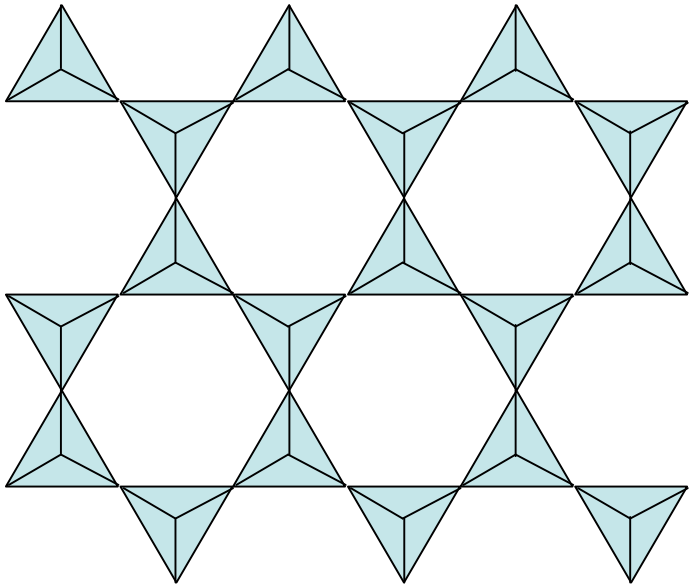

$(Si_2O_5)^{2-}$

- Therefore, cations are required to balance charge

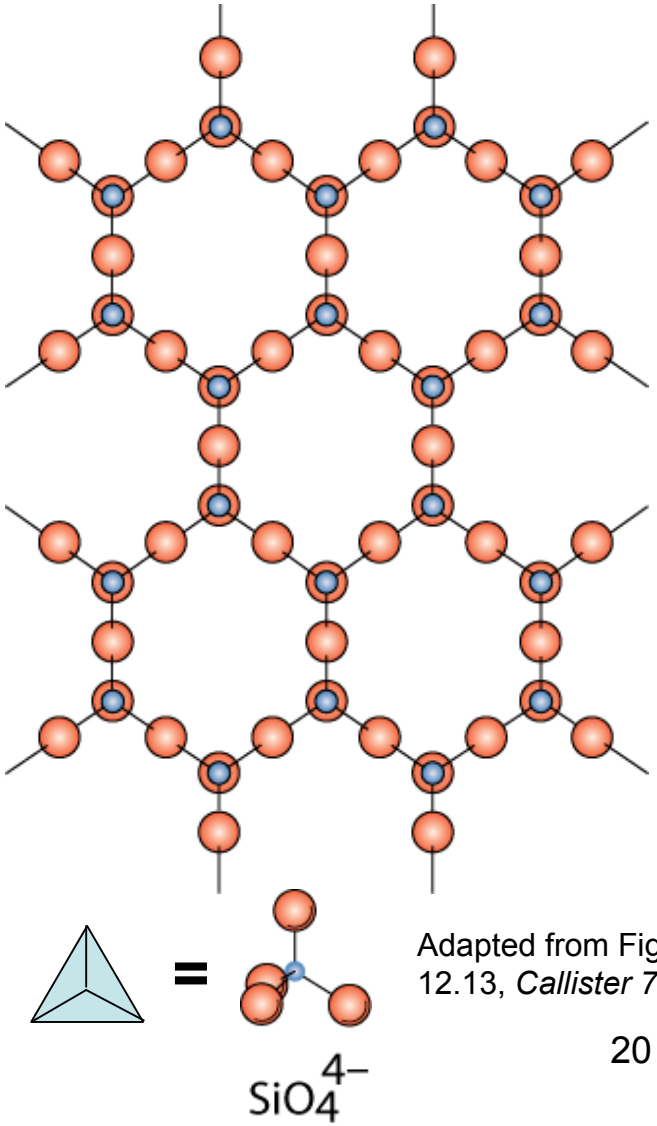

Adapted from Fig. 12.13, *Callister 7e.*

Layered silicates

Kaolinite clay alternates $(Si_2O_5)^{2-}$ layer with $Al_2(OH)_4^{2+}$ layer

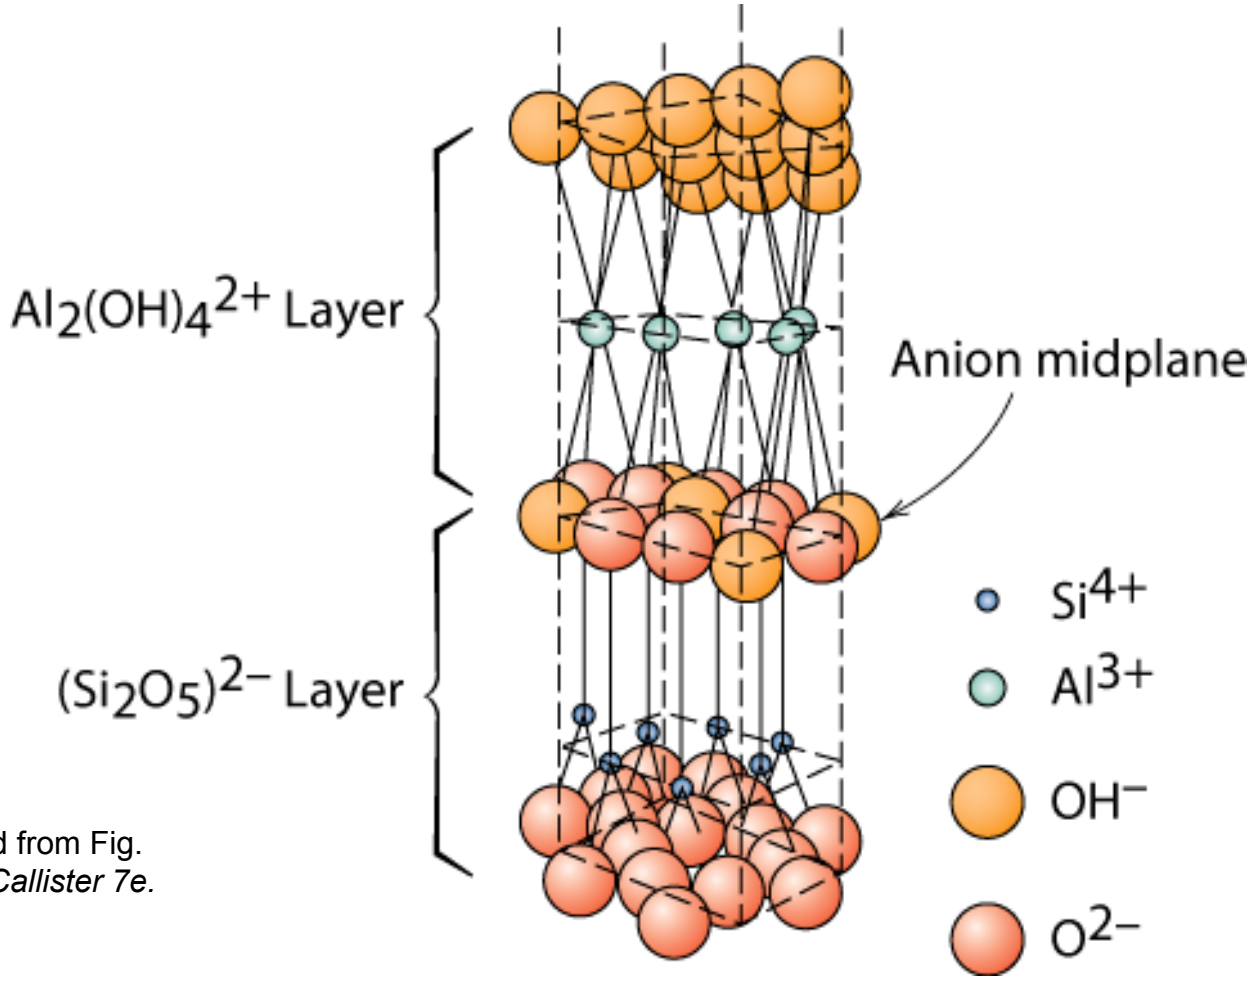

Adapted from Fig. 12.14, *Callister 7e.*

Note: these sheets loosely bound by van der Waal's forces

Carbon forms

- Carbon black – amorphous – surface area ca. 1000 m^2/g
- Diamond
  - tetrahedral carbon
    - hard – no good slip planes
    - brittle – can cut it
  - large diamonds – jewelry
  - small diamonds
    - often man made - used for cutting tools and polishing
  - diamond films
    - hard surface coat – tools, medical devices, etc.

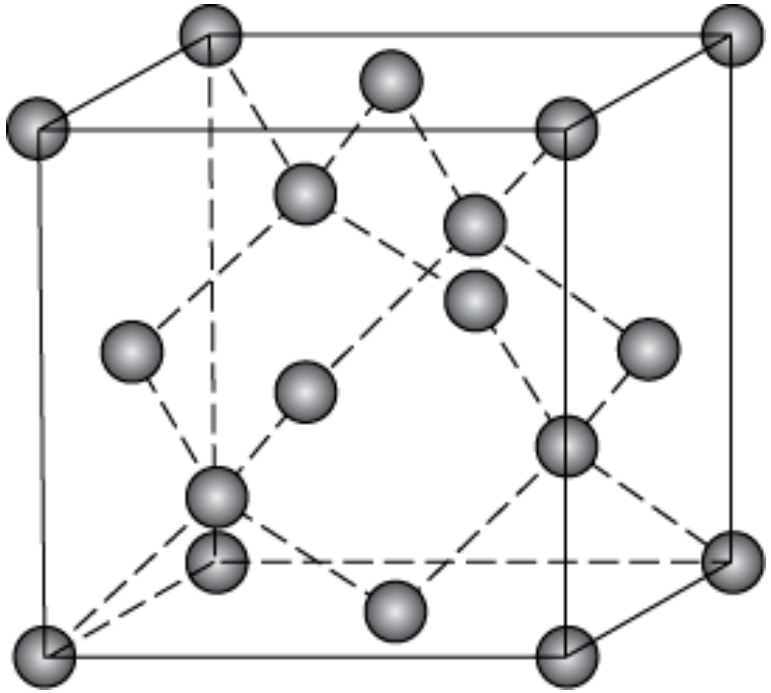

Adapted from Fig. 12.15, *Callister 7e.*

Carbon forms

- layer structure – aromatic layers

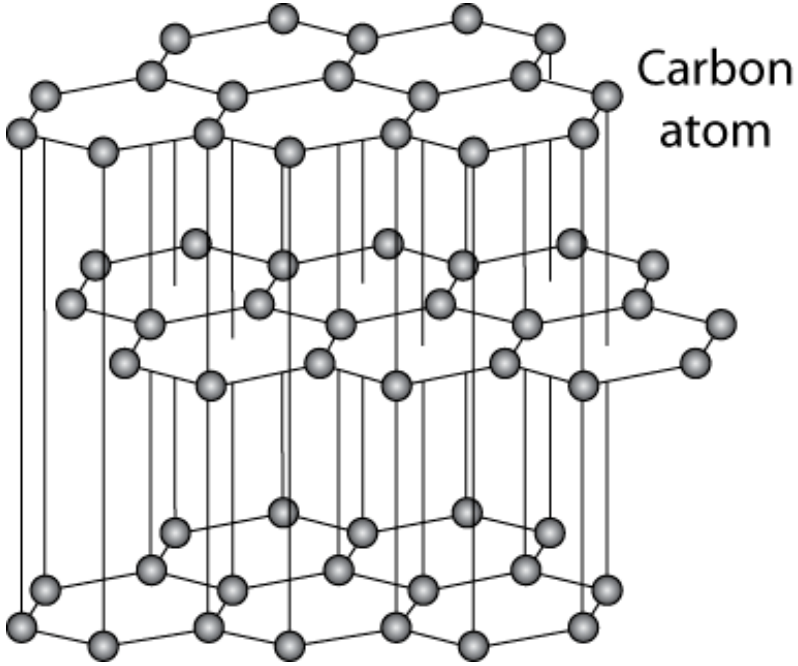

Adapted from Fig. 12.17, *Callister 7e.*

- weak van der Waal's forces between layers
- planes slide easily, good lubricant

Carbon forms

Fullerenes or carbon nanotubes

- •wrap the graphite sheet by curving into ball or tube
- •Buckminister fullerenes
  - •Like a soccer ball C_{60} - also C_{70} + others

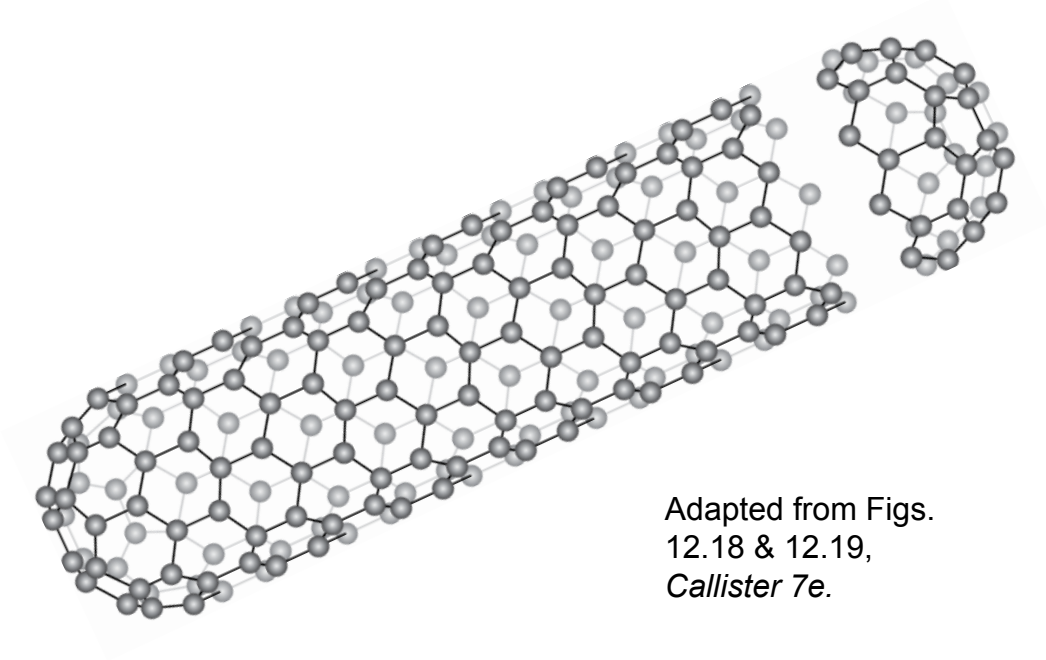

Adapted from Figs. 12.18 & 12.19, *Callister 7e.*

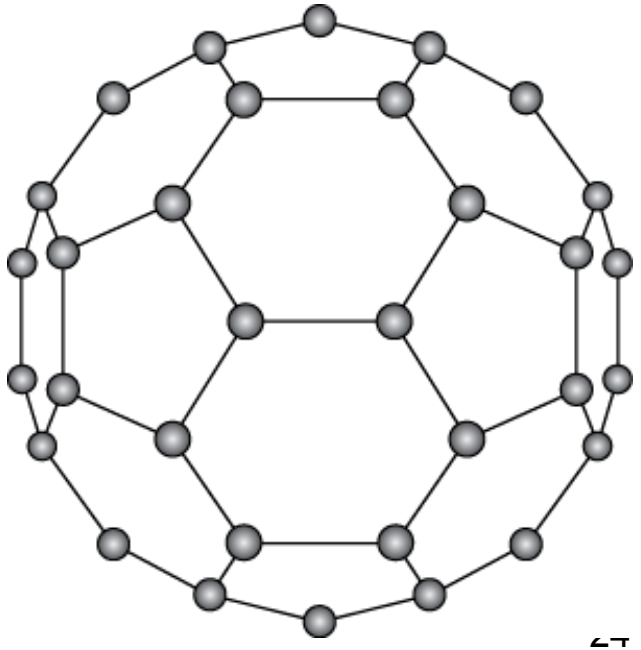

Defects

- Frenkel Defect

- Shottky Defect

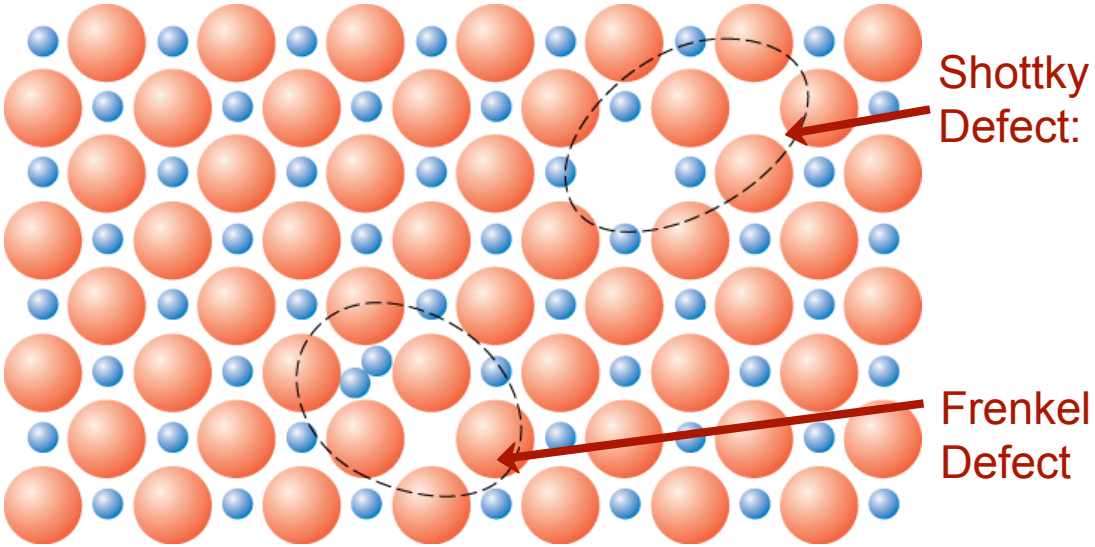

Adapted from Fig. 12.21, *Callister 7e.* (Fig. 12.21 is from W.G. Moffatt, G.W. Pearsall, and J. Wulff, *The Structure and Properties of Materials*, Vol. 1, *Structure*, John Wiley and Sons, Inc., p. 78.)

- Equilibrium concentration of defects

Impurities

- Ex: NaCl

- Substitutional cation impurity

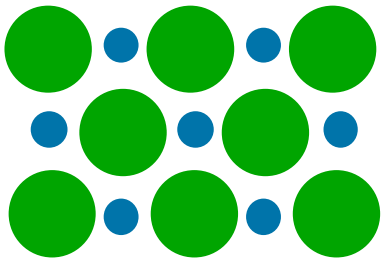

initial geometry



Ca^{2+} impurity

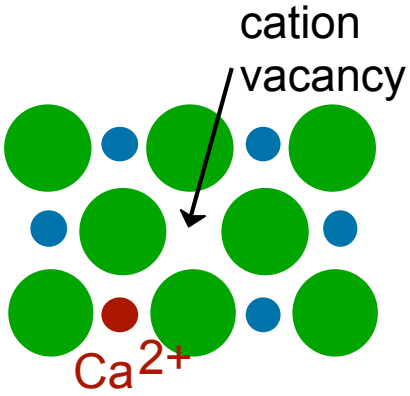

resulting geometry

- Substitutional anion impurity

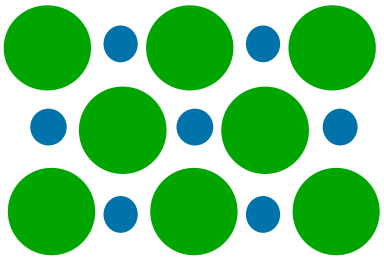

initial geometry



O^{2-} impurity

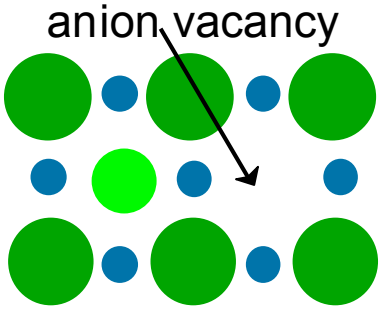

resulting geometry

Ceramic phase diagrams

MgO-Al_2O_3 diagram:

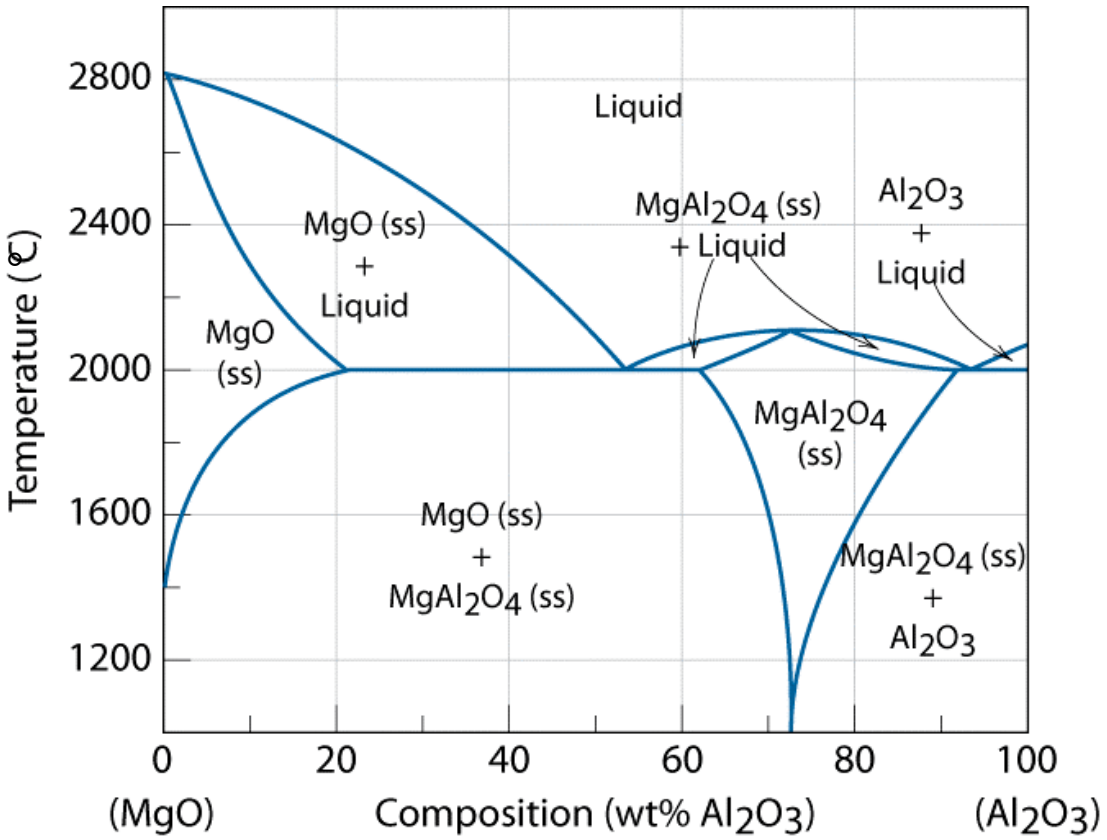

Adapted from Fig. 12.25, *Callister 7e.*

Measuring the elastic modulus

- Room *T* behavior is usually elastic, with brittle failure.
- 3-Point Bend Testing often used.
  --tensile tests are difficult for brittle materials.

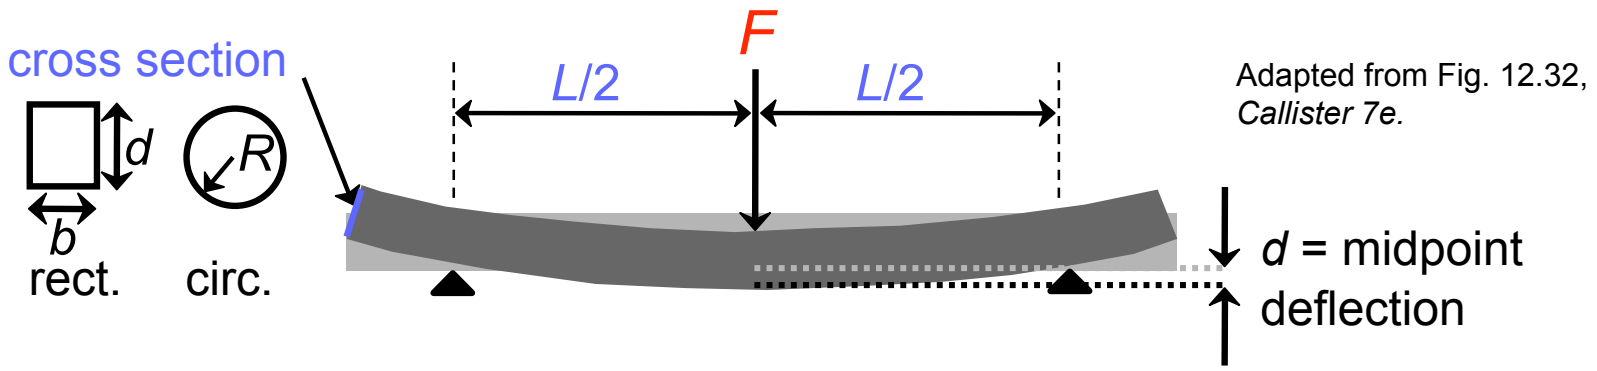

Adapted from Fig. 12.32, *Callister 7e.*

Measuring strengths

- 3-point bend test to measure room *T* strength.

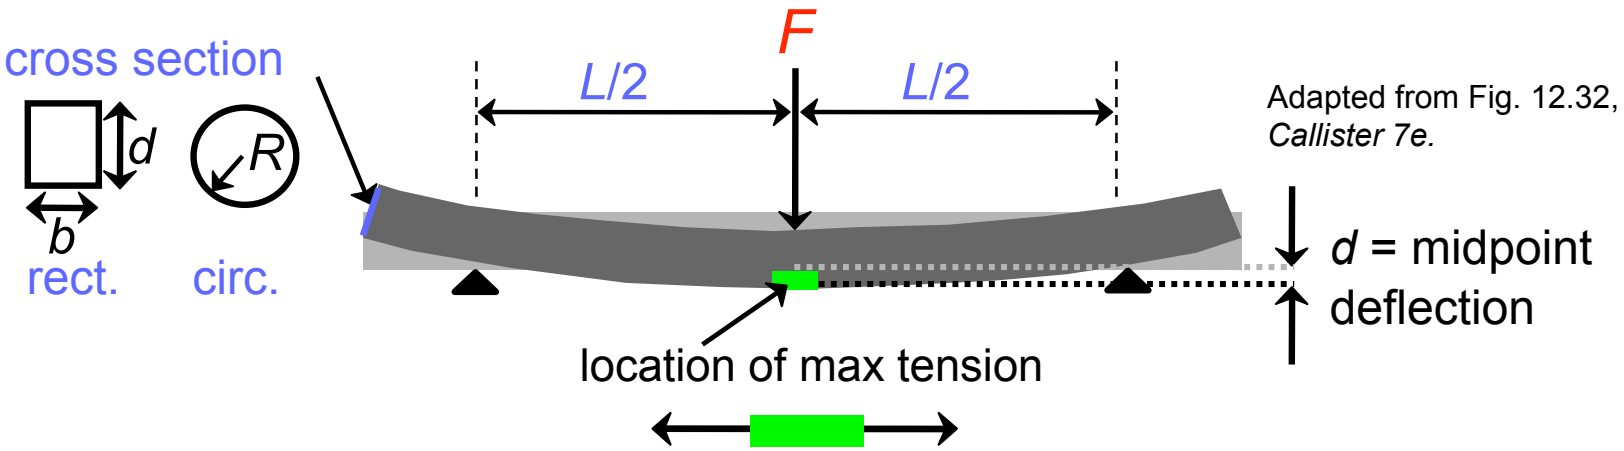

- Typ. values:

Material	σ_{fs} (MPa)	*E*(GPa)
Si nitride	250-1000	304
Si carbide	100-820	345
Al oxide	275-700	393
glass (soda)	69	69

Data from Table 12.5, *Callister 7e.*