

Chapter 16: Composite Materials

- What are the classes and types of composites?
- Why are composites used instead of metals, ceramics, or polymers?
- How do we estimate composite stiffness & strength?
- What are some typical applications?




Composites

- Combine materials with the objective of getting a more desirable combination of properties
 - Ex: get flexibility & weight of a polymer plus the strength of a ceramic
- Principle of combined action
 - Mixture gives “averaged” properties



Composites

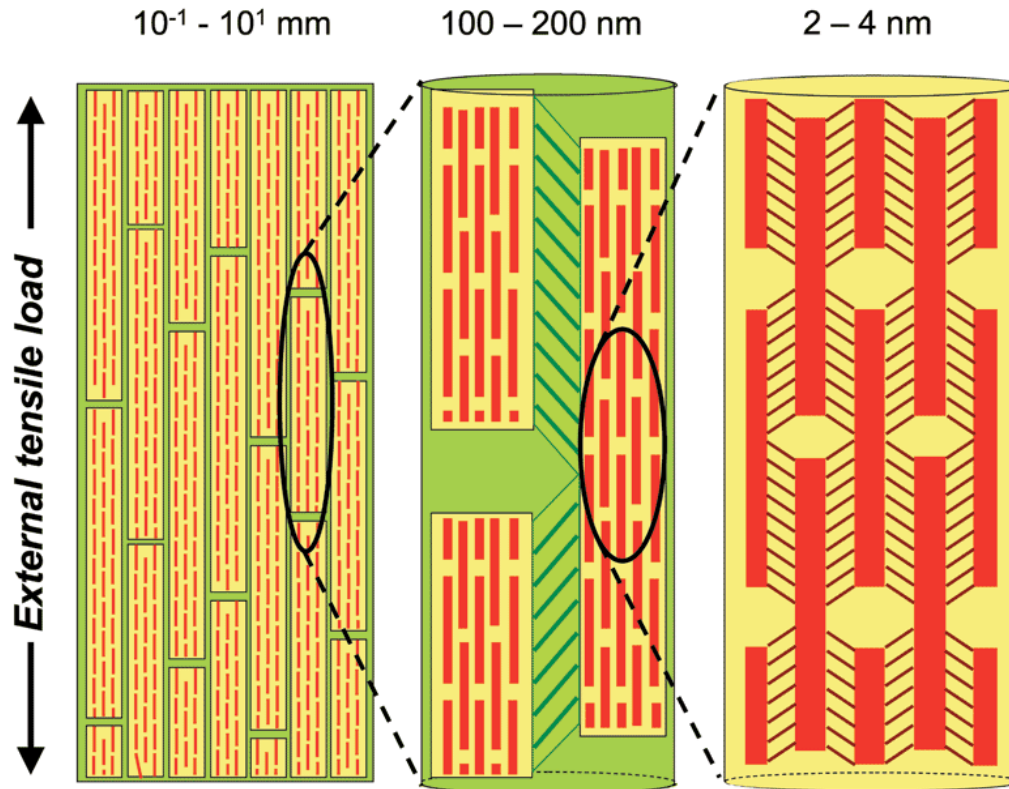


Himadri S. Gupta, Jong Seto, Wolfgang Wagermaier, Paul Zaslansky, Peter Boesecke, and Peter Fratzl, PNAS, November (2006).



Terminology/Classification


- **Composites:**
 - Multiphase material w/significant proportions of each phase.
- **Matrix:**
 - The continuous phase
 - Purpose is to:
 - transfer stress to other phases
 - protect phases from environment
 - Classification: **MMC**, **CMC**, **PMC**
 - metal → ceramic → polymer
- **Dispersed phase:**
 - Purpose: enhance matrix properties.
 - MMC**: increase σ_y , TS , creep resist.
 - CMC**: increase K_c
 - PMC**: increase E , σ_y , TS , creep resist.
 - Classification: **Particle**, **fiber**, **structural**

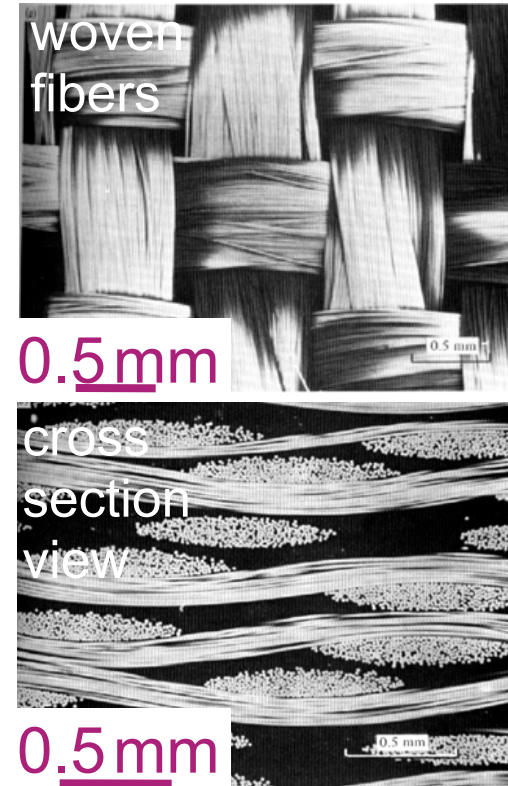

Reprinted with permission from D. Hull and T.W. Clyne, *An Introduction to Composite Materials*, 2nd ed., Cambridge University Press, New York, 1996, Fig. 3.6, p. 47.



Composite Survey

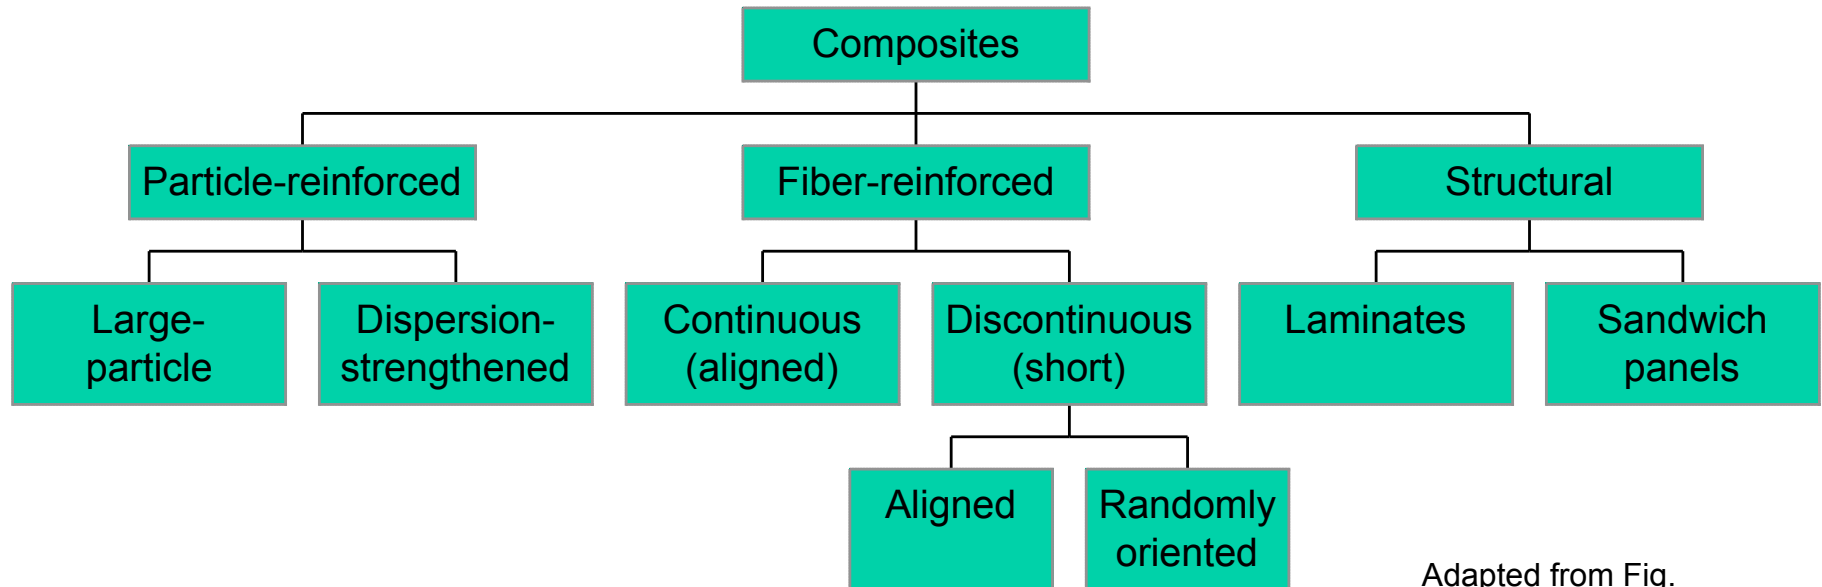

Adapted from Fig. 16.2, *Callister 7e*.



Composite Survey: Particle-I

Particle-reinforced


Fiber-reinforced

Structural

- Examples:

- Spheroidite steel

matrix:
ferrite (α)
(ductile)

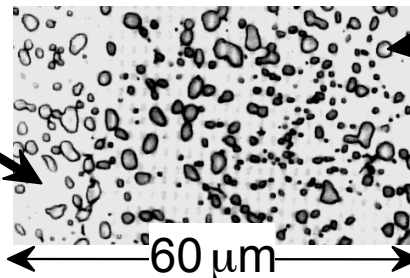


particles:
cementite
(Fe_3C)
(brittle)

Adapted from Fig. 10.19, *Callister 7e*.
(Fig. 10.19 is copyright United States Steel Corporation, 1971.)

- WC/Co cemented carbide

matrix:
cobalt
(ductile)
 V_m :
10-15 vol%!

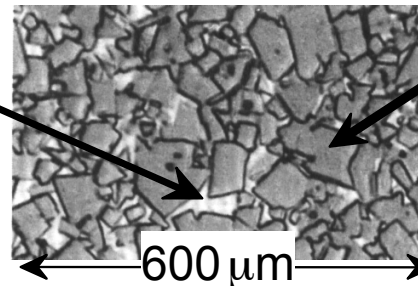


particles:
WC
(brittle,
hard)

Adapted from Fig. 16.4, *Callister 7e*.
(Fig. 16.4 is courtesy Carboloy Systems, Department, General Electric Company.)

- Automobile tires

matrix:
rubber
(compliant)

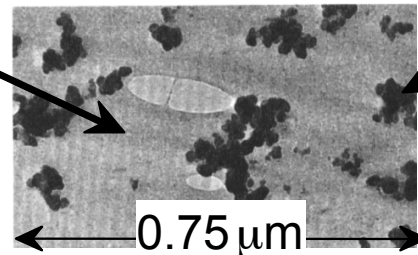

particles:
C
(stiffer)

Adapted from Fig. 16.5, *Callister 7e*.
(Fig. 16.5 is courtesy Goodyear Tire and Rubber Company.)




Composite Survey: Particle-III

Particle-reinforced

Fiber-reinforced

Structural

- **Elastic modulus**, E_c , of composites:
-- two approaches.

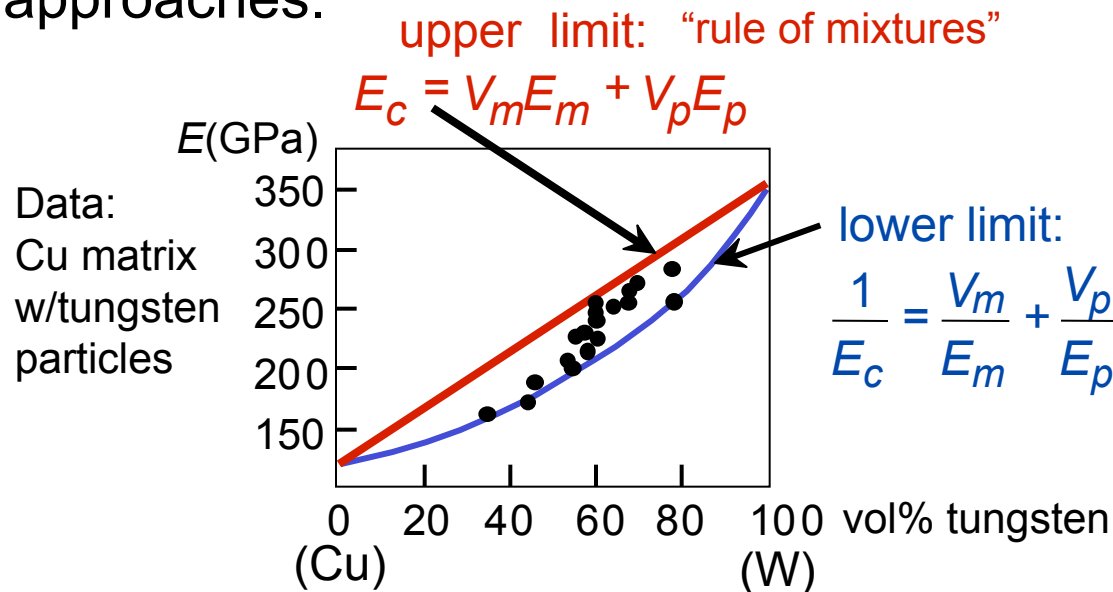


Adapted from Fig. 16.3,
Callister 7e. (Fig. 16.3 is
from R.H. Krock, *ASTM
Proc*, Vol. 63, 1963.)

- Application to other properties:
-- **Electrical conductivity**, σ_e : Replace E in equations with σ_e .
-- **Thermal conductivity**, k : Replace E in equations with k .



Composite Survey: Fiber-I

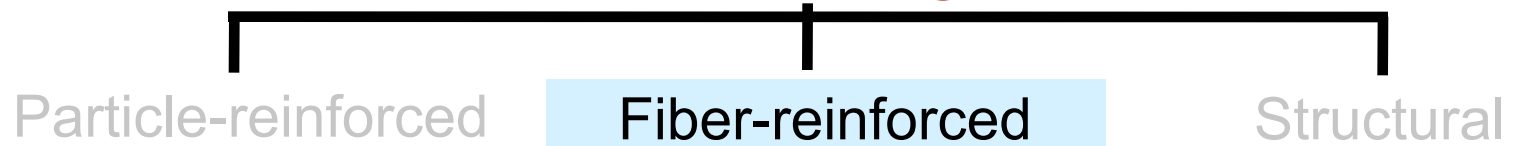

- **Fibers very strong**
 - Provide significant strength improvement to material
 - Ex: fiber-glass
 - Continuous glass filaments in a polymer matrix
 - Strength due to fibers
 - Polymer simply holds them in place



Composite Survey: Fiber-II

Particle-reinforced

Fiber-reinforced


Structural

- **Fiber Materials**

- **Whiskers** - Thin single crystals - large length to diameter ratio
 - graphite, SiN, SiC
 - high crystal perfection – extremely strong, strongest known
 - very expensive
- **Fibers**
 - polycrystalline or amorphous
 - generally polymers or ceramics
 - Ex: Al₂O₃ , Aramid, E-glass, Boron, UHMWPE
- **Wires**
 - Metal – steel, Mo, W



Fiber Alignment

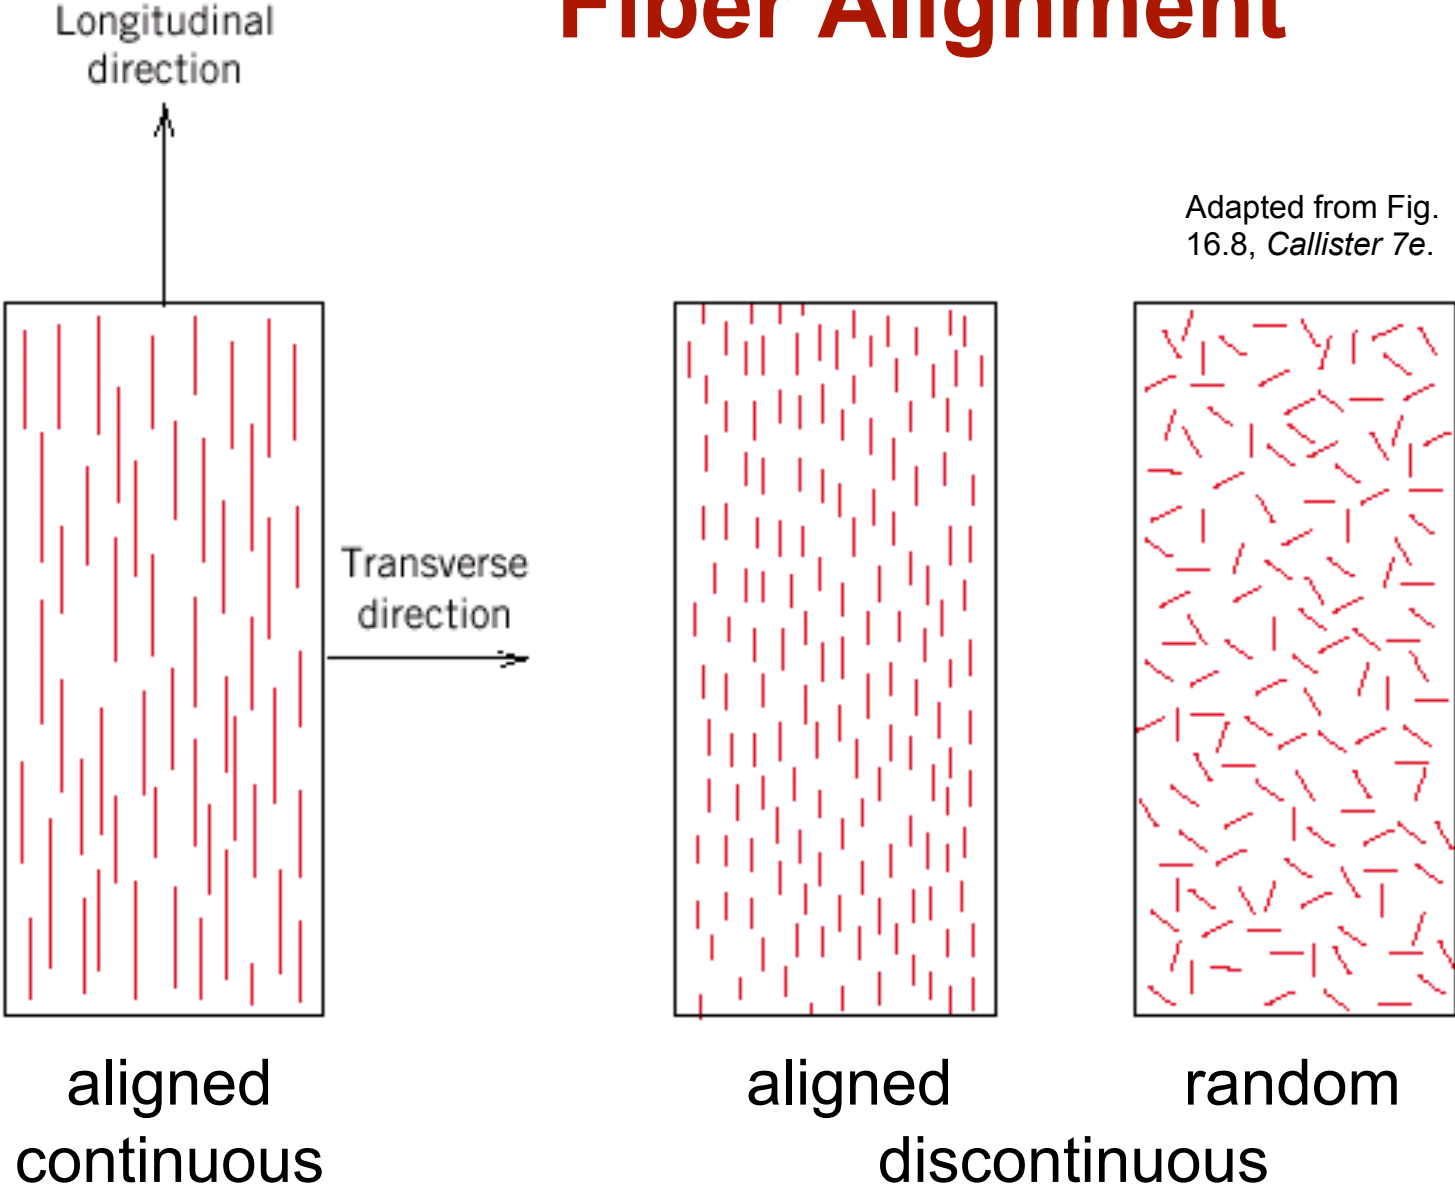

Adapted from Fig. 16.8, *Callister 7e*.

Composite Survey: Fiber-III


Particle-reinforced

Fiber-reinforced

Structural

- Aligned Continuous fibers
- Examples:



-- **Metal:** γ' (Ni₃Al)- α (Mo)
by eutectic solidification.
matrix: α (Mo) (ductile)

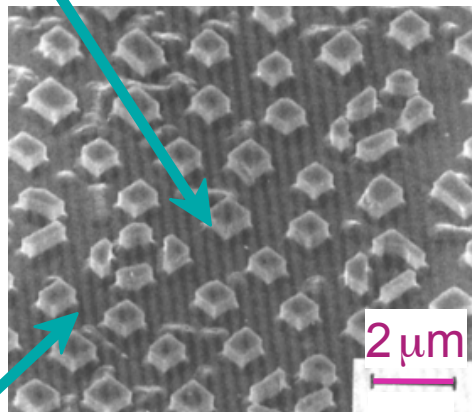

fibers: γ' (Ni₃Al) (brittle)

From W. Funk and E. Blank, "Creep deformation of Ni₃Al-Mo in-situ composites", *Metall. Trans. A* Vol. 19(4), pp. 987-998, 1988. Used with permission.

-- **Ceramic:** Glass w/SiC fibers
formed by glass slurry
 $E_{\text{glass}} = 76 \text{ GPa}$; $E_{\text{SiC}} = 400 \text{ GPa}$.

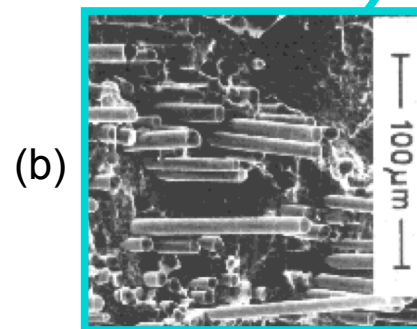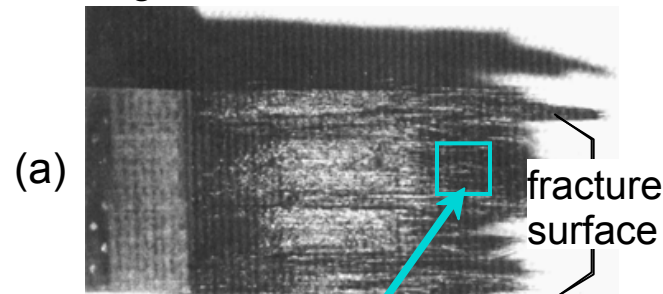

From F.L. Matthews and R.L. Rawlings, *Composite Materials; Engineering and Science*, Reprint ed., CRC Press, Boca Raton, FL, 2000. (a) Fig. 4.22, p. 145 (photo by J. Davies); (b) Fig. 11.20, p. 349 (micrograph by H.S. Kim, P.S. Rodgers, and R.D. Rawlings). Used with permission of CRC Press, Boca Raton, FL.




Composite Survey: Fiber-IV

Particle-reinforced

Fiber-reinforced

Structural

- Discontinuous, random 2D fibers
- Example: Carbon-Carbon
 - process: fiber/pitch, then burn out at up to 2500°C.
 - uses: disk brakes, gas turbine exhaust flaps, nose cones.

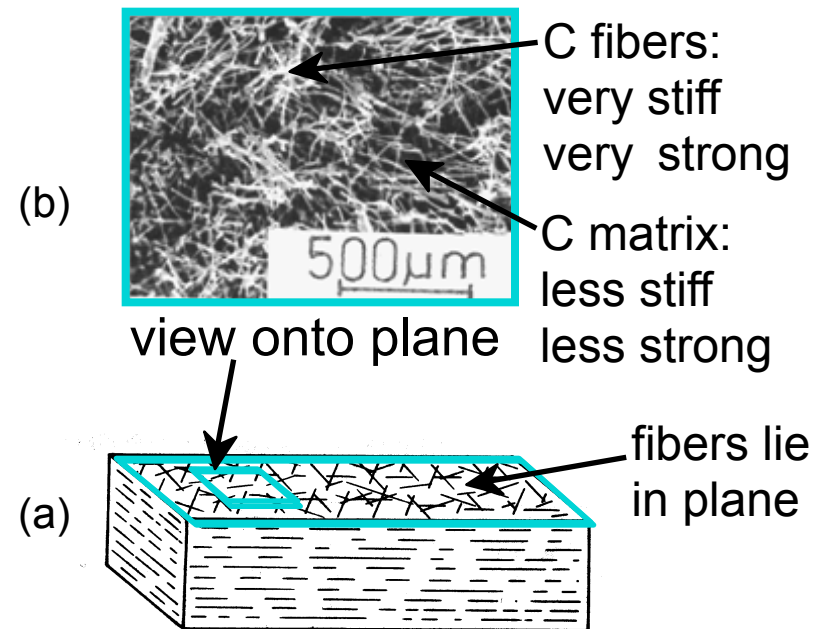

- Other variations:
 - Discontinuous, random 3D
 - Discontinuous, 1D

Adapted from F.L. Matthews and R.L. Rawlings, *Composite Materials; Engineering and Science*, Reprint ed., CRC Press, Boca Raton, FL, 2000. (a) Fig. 4.24(a), p. 151; (b) Fig. 4.24(b) p. 151. (Courtesy I.J. Davies) Reproduced with permission of CRC Press, Boca Raton, FL.



Composite Survey: Fiber-V

Particle-reinforced

Fiber-reinforced

Structural

- **Critical** fiber length for effective stiffening & strengthening:
fiber strength in tension

$$\text{fiber length} > 15 \frac{\sigma_f d}{\tau_c}$$


σ_f
 d
 τ_c

← fiber diameter
← shear strength of fiber-matrix interface

- Ex: For fiberglass, fiber length > 15 mm needed
- Why? Longer fibers carry stress more efficiently!

Shorter, thicker fiber:


$$\text{fiber length} < 15 \frac{\sigma_f d}{\tau_c}$$

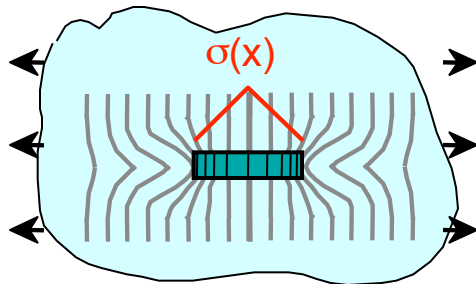

Poorer fiber efficiency

Longer, thinner fiber:

$$\text{fiber length} > 15 \frac{\sigma_f d}{\tau_c}$$

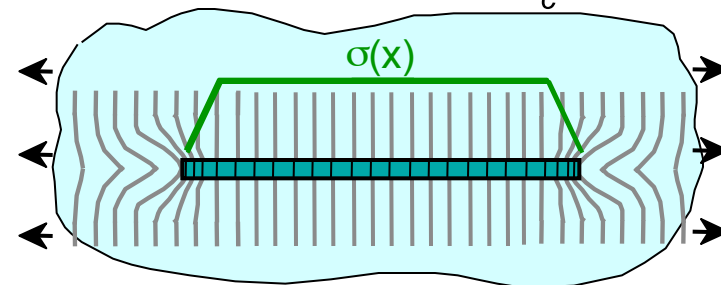

Better fiber efficiency

Adapted from Fig. 16.7, Callister 7e.





Fiber-reinforced composites

- **Stress-strain relation for brittle fiber and ductile matrix**
- **Elastic modulus in longitudinal**

$$E_{cl} = E_m V_m + E_f V_f$$


- **Elastic modulus for transverse loading**

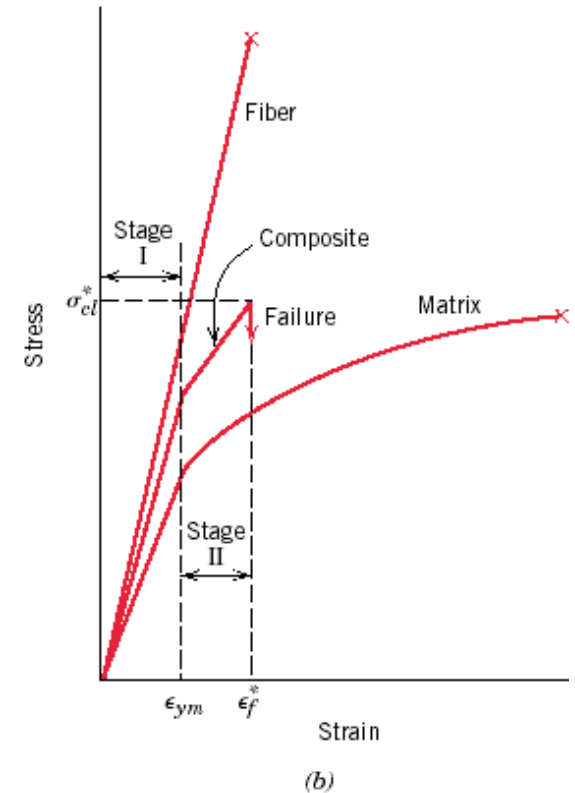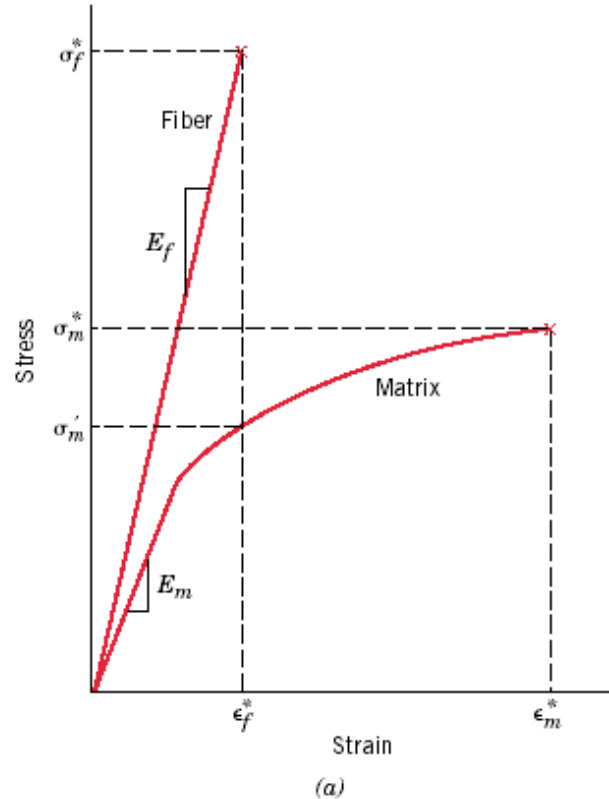

$$E_{ct} = \frac{E_m E_f}{(1 - V_f) E_f + V_f E_m}$$



Fiber Composites

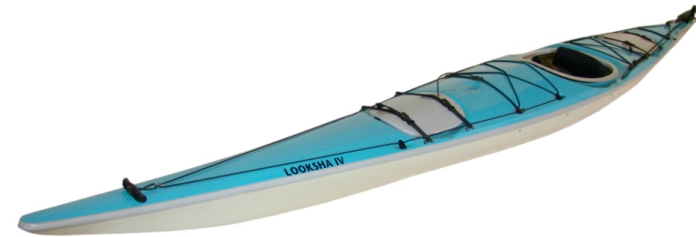


Composite Survey: Structural

Particle-reinforced

Fiber-reinforced

Structural



- Stacked and bonded fiber-reinforced sheets
 - stacking sequence: e.g., $0^\circ/90^\circ$
 - benefit: balanced, in-plane stiffness

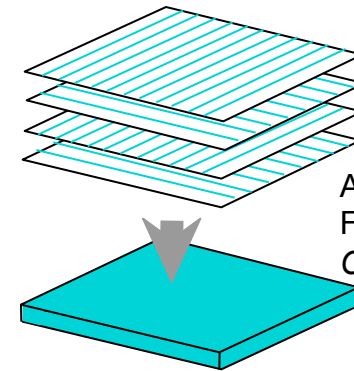

Adapted from
Fig. 16.16,
Callister 7e.

- Sandwich panels
 - low density, honeycomb core
 - benefit: small weight, large bending stiffness


face sheet
adhesive layer
honeycomb

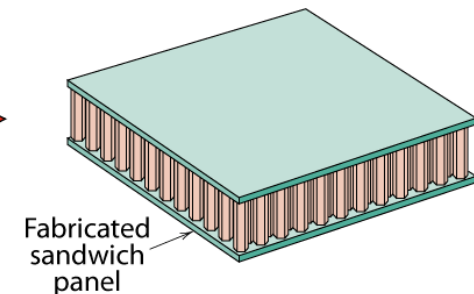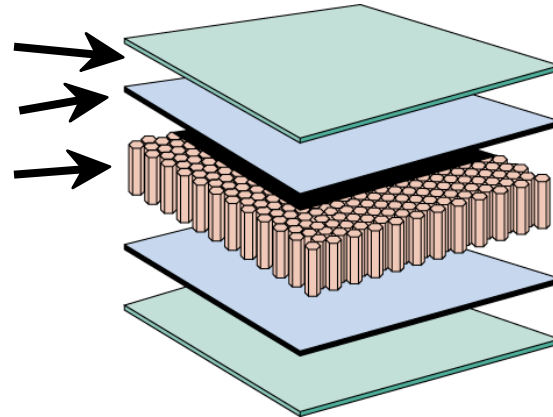

Adapted from Fig. 16.18,
Callister 7e. (Fig. 16.18 is
from *Engineered Materials
Handbook*, Vol. 1, *Composites*, ASM International, Materials Park, OH, 1987.)



Snowboards

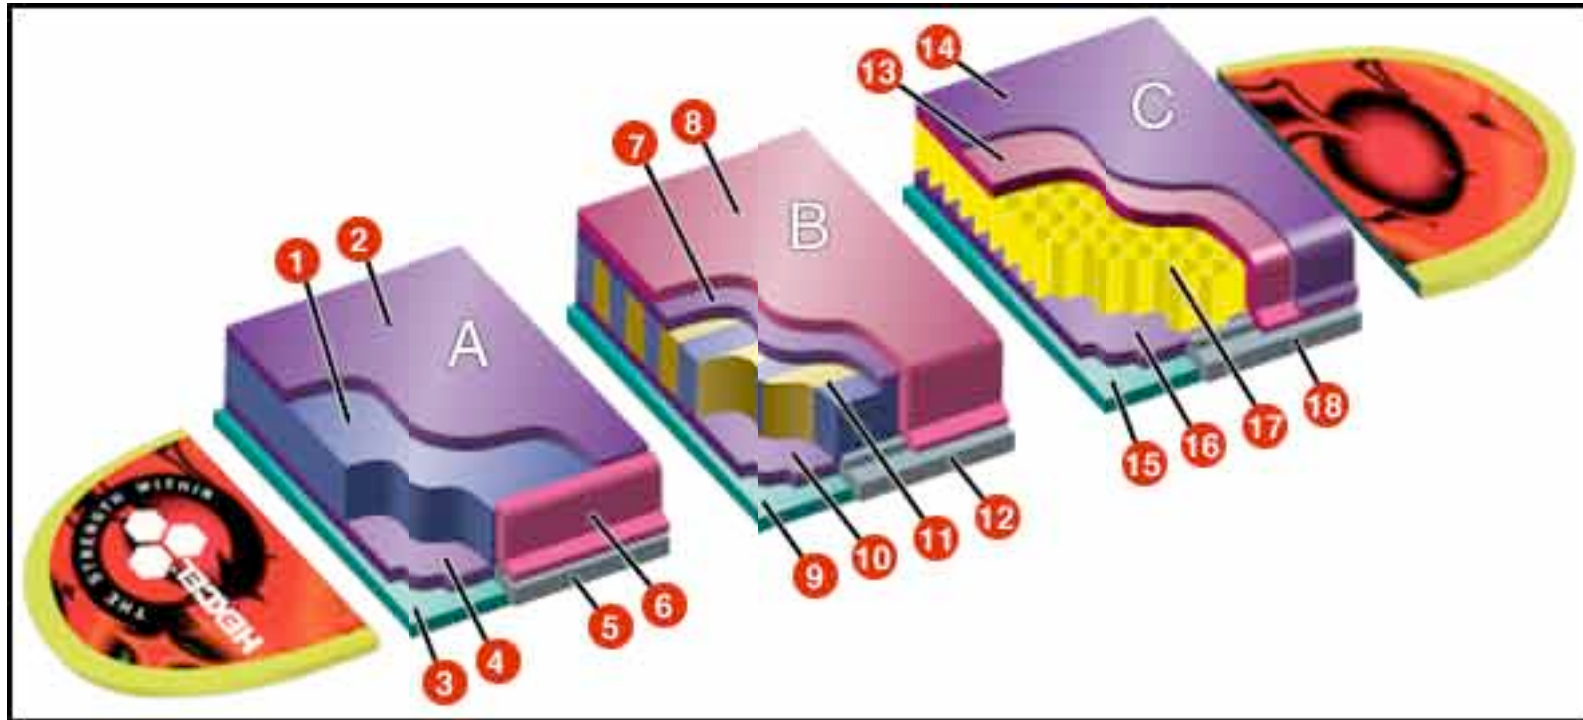

- 1 Honeycomb/ Polyurethane core
- 2 Epoxy/Glass, Carbon or Hybrid Top Laminate
- 3 PE Running Surface:
- 4 Epoxy/Glass, Carbon or Hybrid Bottom Laminate:
- 5 Profile Steel Edge:
- 6 Sidewall (ABS) :
- 7 Top Laminate
- 8 Decorative Thermoplastic Cap Foil
- 9 PE Running Surface:


www.hexcel.com

- 10 Glass, Carbon, or Hybrid Prepreg:
- 11 Honeycomb, polyurethane or wood core (PUR/ wood combination demonstrated here):
- 12 Steel Edge :
- 13 Prepreg:
- 14 Decorative Thermoplastic Cap Foil:
- 15 PE running surfaces:
- 16 Glass, Carbon or Hybrid Prepreg:
- 17 Honeycomb/ Polyurethane core:
- 18 Steel Edge:




Composite Benefits


- CMCs: Increased toughness

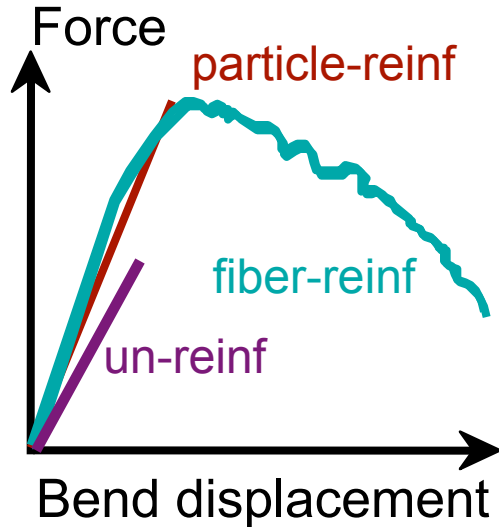

- PMCs: Increased E/ρ

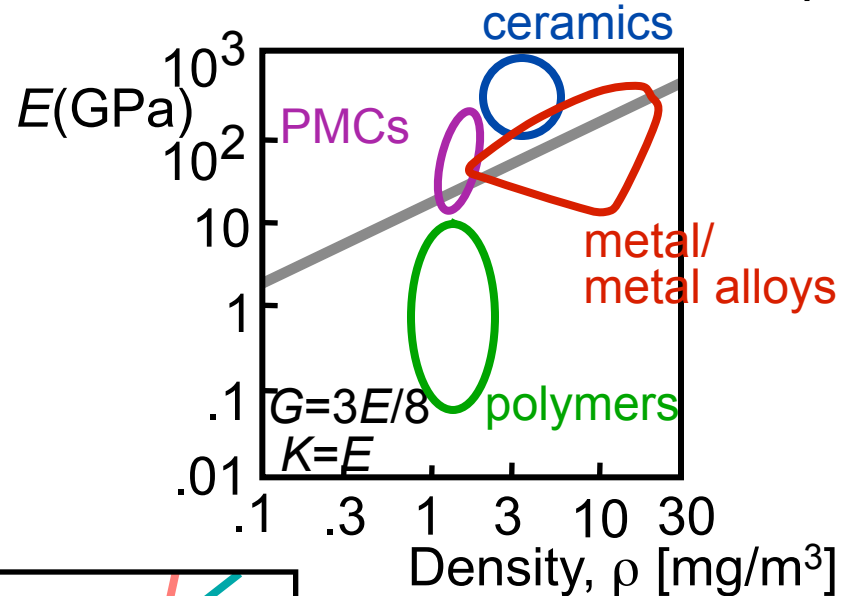

- MMCs: Increased creep resistance

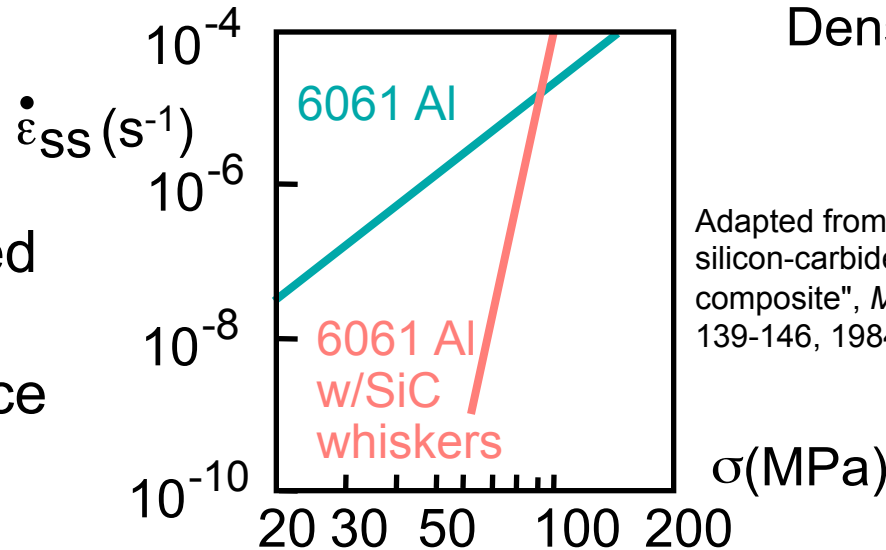

Adapted from T.G. Nieh, "Creep rupture of a silicon-carbide reinforced aluminum composite", *Metall. Trans. A* Vol. 15(1), pp. 139-146, 1984. Used with permission.



Summary

- Composites are classified according to:
 - the matrix material (CMC, MMC, PMC)
 - the reinforcement geometry (particles, fibers, layers).
- Composites enhance matrix properties:
 - MMC: enhance σ_y , TS , creep performance
 - CMC: enhance K_c
 - PMC: enhance E , σ_y , TS , creep performance
- **Particulate-reinforced:**
 - Elastic modulus can be estimated.
 - Properties are isotropic.
- **Fiber-reinforced:**
 - Elastic modulus and TS can be estimated along fiber dir.
 - Properties can be isotropic or anisotropic.
- **Structural:**
 - Based on build-up of sandwiches in layered form.

